

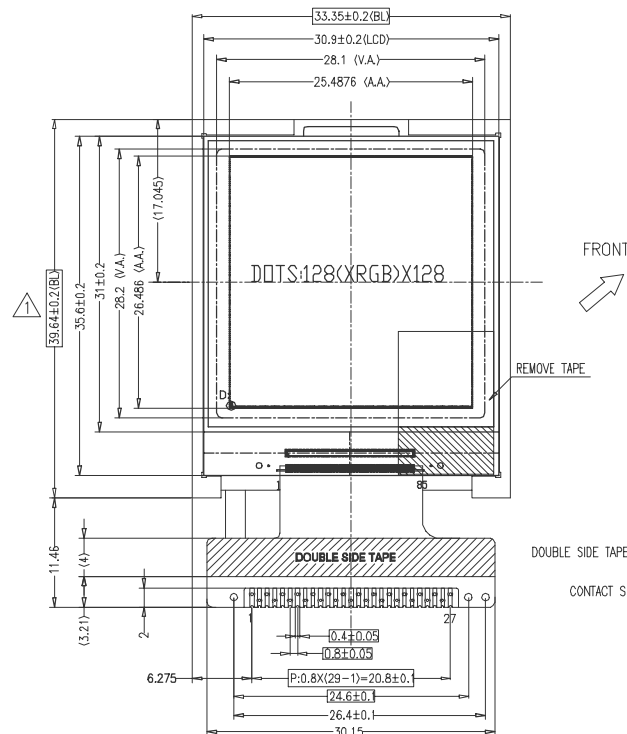
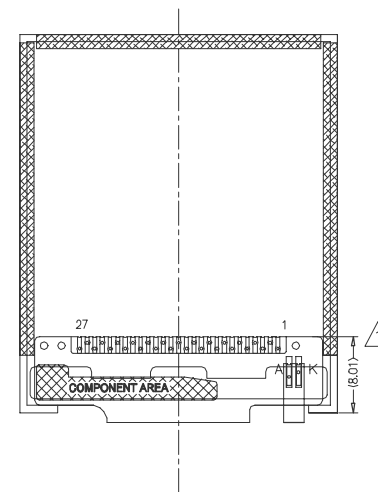


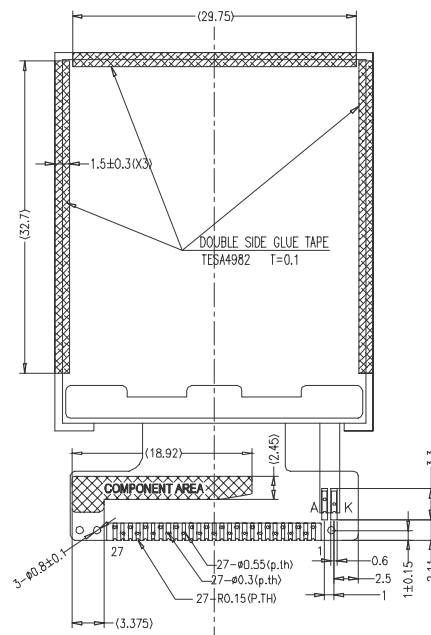


FRONT

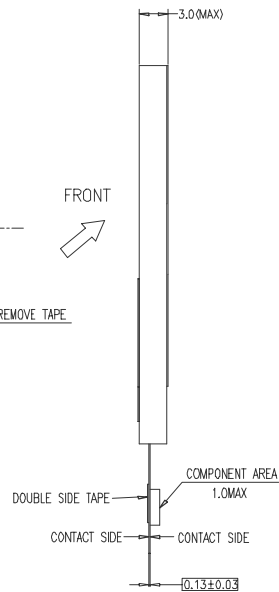

PIN	SYMBOL
1	VDD
2	VSS
3	NC
4	NC
5	CS0
6	AO
7	RD
8	WR
9	RSTB
10	DB0
11	NC
12	DB1
13	NC
14	DB2
15	NC
16	DB3
17	NC
18	DB4
19	NC
20	DB5
21	NC
22	DB6
23	NC
24	DB7
25	NC
26	LED-
27	LED+

NOTES:

1. DISPLAY TYPE: CSTN (65K COLOR)
2. VIEWING DIRECTION: 6:00
3. POLARIZER MODE: TRANSMISSIVE/NEGATIVE
4. LCD CONTROLLER: ST7637
5. DRIVE METHOD: 1/128 DUTY 1/12 BIAS
6. VDD: 2.8V
7. OPERATING VOLTAGE: 14V
8. BACKLIGHT: 2 CHIP-WHITE LED
9. OPERATING TEMP.: -20°C~70°C
10. STORAGE TEMP.: -30°C~80°C
11. UNMARKED TOLERANCE:±0.3
12. MEANS IMPORTANT DIMENSION



	CHANGE BL DIMENSION	06-11-28
REV	DESCRIPTION	DATE
MULTI-INNO TECHNOLOGY CO.,LTD.		
DRAWN BY:	TITLE: MI128128RK  	
CHECKED BY:		
APPROVED BY:		
CONFIRMED BY:	DWG NAME:	SHEET NO: 1 OF 1
	DWG NO: G-2	SCALE: UNT: mm