






MODULE NO.: MI128160IK

Ver 1.0

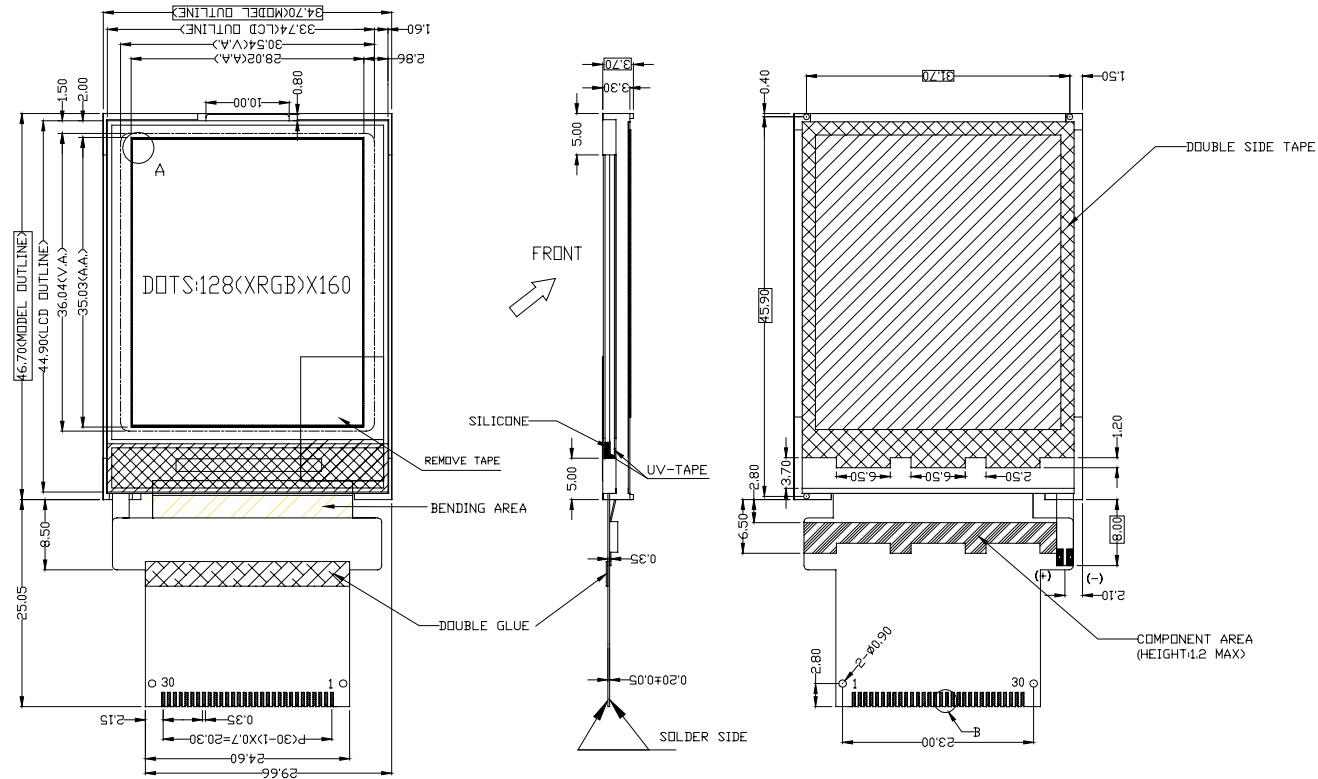

- NOTES:
- 1.DISPLAY TYPE: CSTN
 - 2.VIEWING DIRECTION: 6:00
 - 3.LCD DRIVE IC: S6B33B9
 - 4.POLARIZER MODE: TRANSMISSIVE/NEGATIVE
 - 5.DRIVE METHOD: 1/162 DUTY 1/5 BIAS
 - 6.VDD: 2.9V
 - 7.OPERATING VOLTAGE: 17.6V
 - 8.BACKLIGHT: 3-CHIP SERIAL WHITE LED
 - 9.OPERATING TEMP: -20 °C -- +70 °C
 - 10.STORAGE TEMP: -30 °C -- +80 °C
 - 11.UNMARKED TOLERANCE: ±0.30
 - 12.IMPORTANT DIMENSION:



NO.	SYMBOL
1	GND
2	GND
3	/RESET
4	/WR
5	/RD
6	/RS(A0)
7	/CS
8	D15
9	D14
10	D13
11	D12
12	D11
13	D10
14	D9
15	D8
16	D7
17	D6
18	D5
19	D4
20	D3
21	D2
22	D1
23	D0
24	GND
25	VDD(2.9V)
26	VDD(2.9V)
27	GND
28	GND
29	LED+
30	LED-

MULTI-INNO TECHNOLOGY CO.,LTD.

DRAWN BY:	TITLE: MI128160IK	
CHECKED BY:	DWG NO: G-2	
APPROVED BY:	DWG NAME:	SHEET NO: 1 OF 1
CONFIRMED BY:		

VER	DESCRIPTION	DATE
G-2	MODIFY OUTLINE DRAWING	2005.04.11