


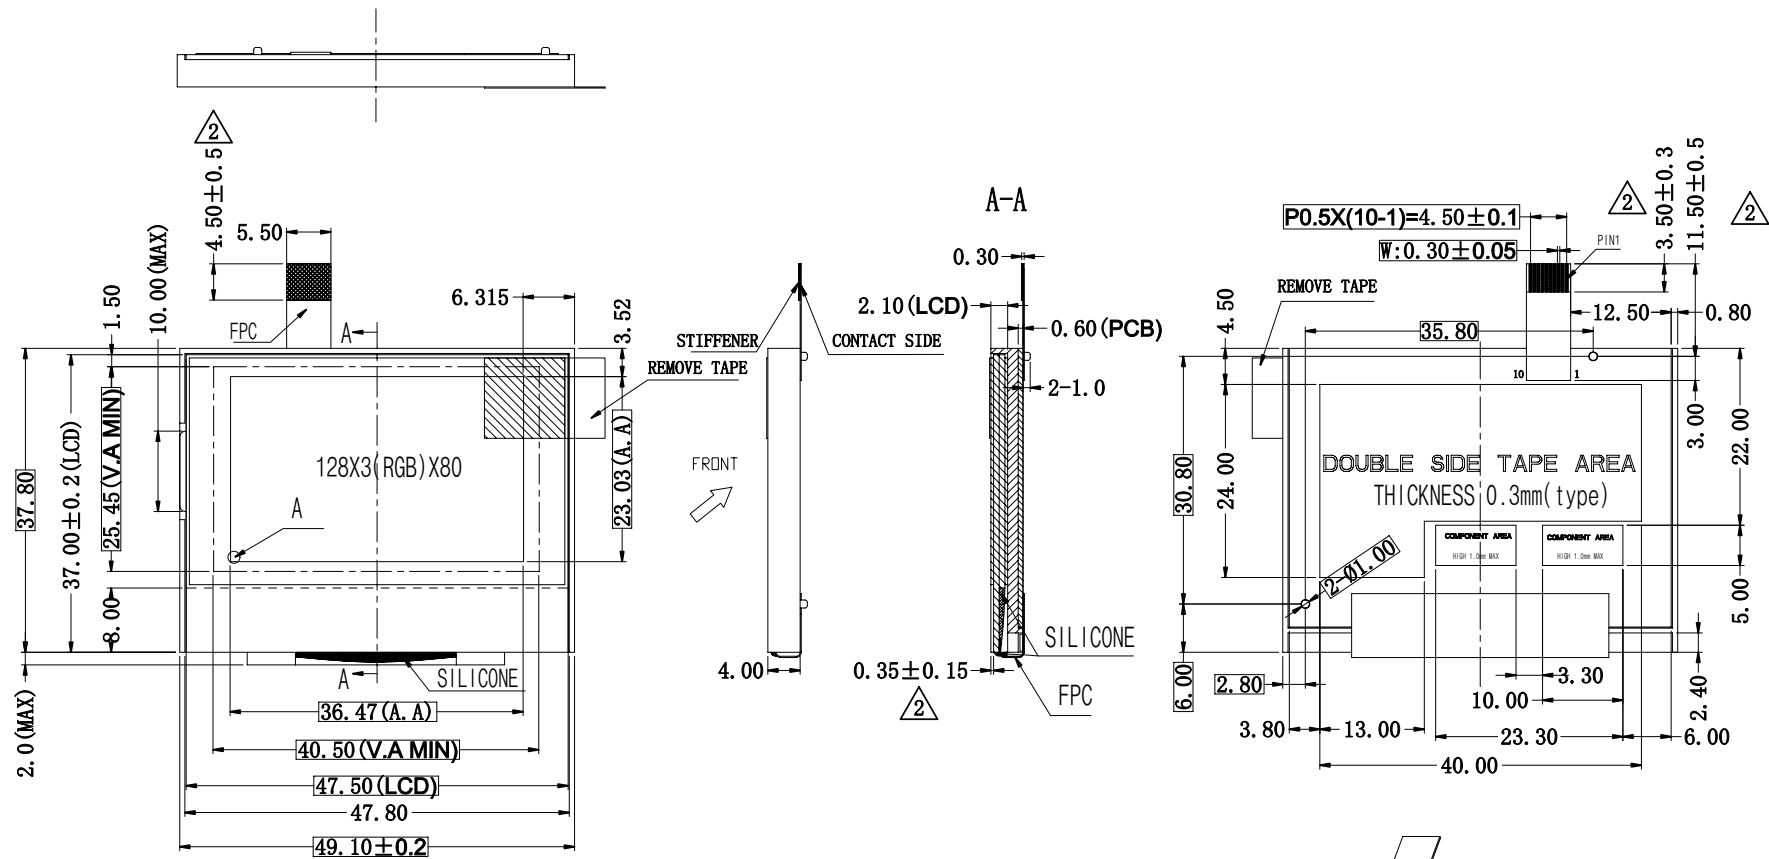


PIN DESCRIPTION

PIN	SYMBOL
1	NC
2	A
3	K
4	SID
5	SCL
6	RS
7	RESET
8	CS1B
9	VSS
10	VDD

NOTES:

1. DISPLAY TYPE: CSTN
2. VIEWING DIRECTION: 6:00
3. POLARIZER MODE: TRANSFLECTIVE/NEGATIVE
4. DRIVE METHOD: 1/80 DUTY 1/5 BIAS
5. LCD OPERATING VOLTAGE: 15.8V
6. LOGIC VOLTAGE: 3.0V
7. OPERATING TEMP.: -20° C~+70° C
8. STORAGE TEMP.: -30° C~+80° C
9. CONTROLLER: S6B33BG
10. BACKLIGHT: 3 DIES(WHITE;3.0V;45±10mA) 2
11. UNMARKED TOLERANCE: MECHANIC TOL ±0.3 mm
12. MEANS IMPORTANT DIMENSION
13. REQUIREMENTS ON ENVIRONMENTAL PROTECTION: RoHS

DETAIL A:



MULTI-INNO TECHNOLOGY CO.,LTD.

G-3	Changed FPC dimension (Change the length of the stiffener and PIN) Change backlight parameter	2007.10.20	DRAWN BY:	TITLE: MI12880AK	
	Changed the Vop to 15.8V value from Max to Type Changed backlight voltage		CHECKED BY:		
G-2	Changed the Vop to 15.8V value from Max to Type Changed backlight voltage	2007.3.20	APPROVED BY:	DWG NO: G-3	SCALE:
REV	DESCRIPTION	DATE	CONFIRMED BY:	DWG NAME:	UNIT: mm
				SHEET NO: 1 OF 1	