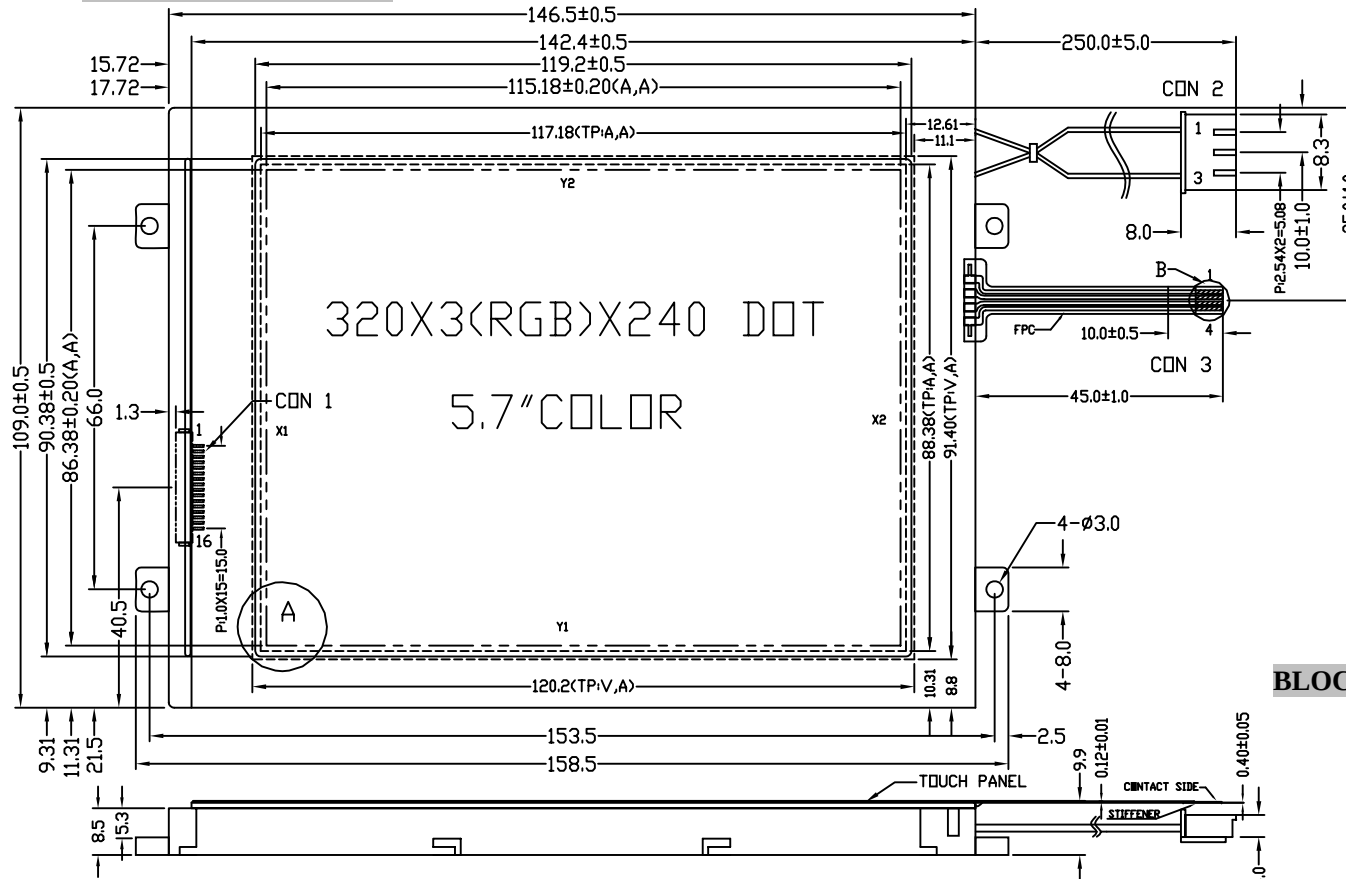





OUTLINE DIMENSION:**NOTES:**

- | | |
|------------------------------|-----------------------|
| 1. DISPLAY TYPE: | COLOR STN |
| 2. VIEWING DIRECTION: | 6:00 |
| 3. POLARIZER MODE: | TRANSMISSIVE/NEGATIVE |
| 4. DRIVE METHOD: | 1/240 DUTY 1/15 BIAS |
| 5. VEE: | 21.6V |
| 6. VDD: | 5.0V |
| 7. OPERATING TEMP: | -10°C~+55°C |
| 8. STORAGE TEMP: | -20°C~+65°C |
| 9. DRIVER: | LH1562F4 |
| 10. BACKLIGHT: | CCFL(WHITE) |
| 11. BEZEL IS STAINLESS STEEL | |
| 12. ALL UNMARKED TOLERANCES: | ±0.3mm |

DETAIL: A**DETAIL: B****COLOR FILTER
BLACK MASK****CON 1**

PIN	SYMBOL
1	M
2	YD
3	LP
4	XCK
5	DISPOFF
6	VDD
7	VSS
8	VEE
9	D7
10	D6
11	D5
12	D4
13	D3
14	D2
15	D1
16	D0

CON 2

PIN	SYMBOL
1	VFL1
2	NC
3	VFL2

CON 3

PIN	SYMBOL
1	Y2
2	X2
3	Y1
4	X1

BLOCK DIAGRAM: