



PIN	SYMBOL	PIN	SYMBOL
1	NC	20	V _{OUT}
2	PS0	21	C5+
3	PS1	22	C3+
4	CSB	23	C1-
5	RESETB	24	C1+
6	RS	25	C2+
7	R _W $\overline{VR}$	26	C2-
8	E _{-RD}	27	C4+
9	DB0	28	REF
10	DB1	29	VEXT
11	DB2	30	INTRS
12	DB3	31	V4
13	DB4	32	V3
14	DB5	33	V2
15	DB6	34	V1
16	DB7	35	V0
17	V _{DD}	36	VR
18	V _{C1}	37	DSCI
19	VSS	38	NC

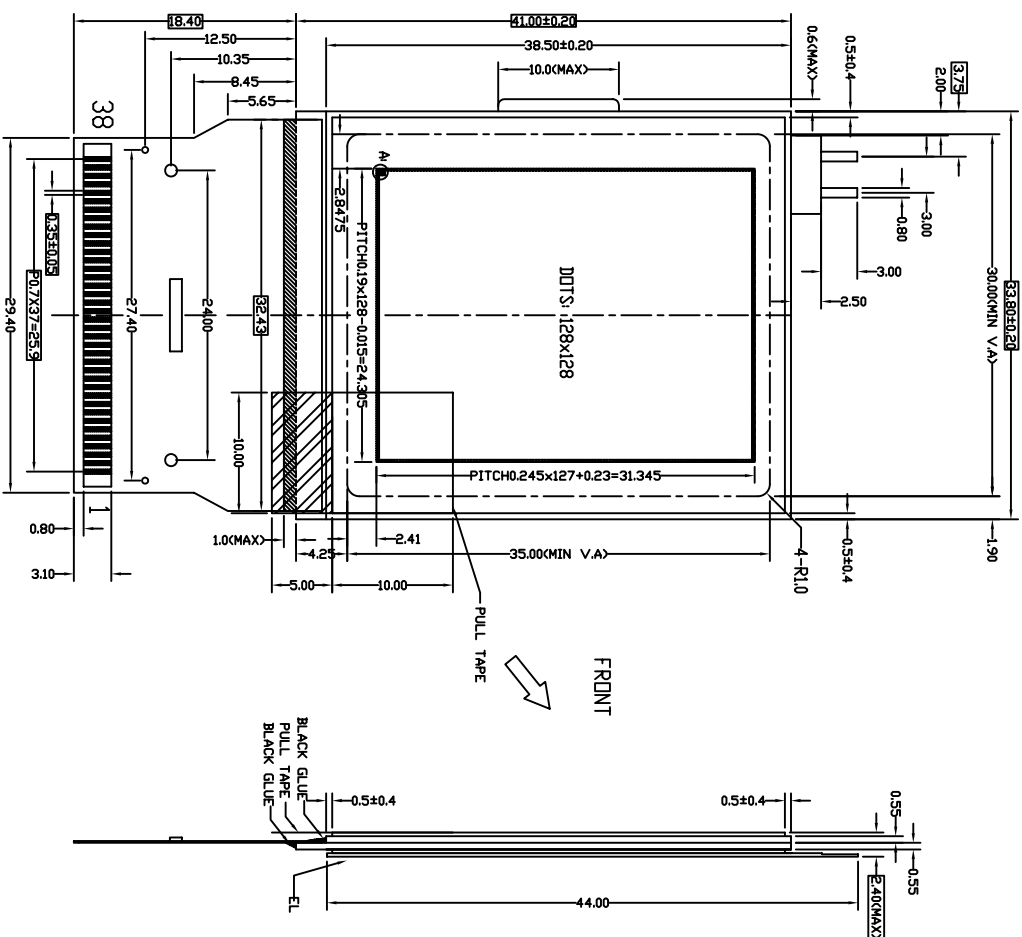

DETAIL A:

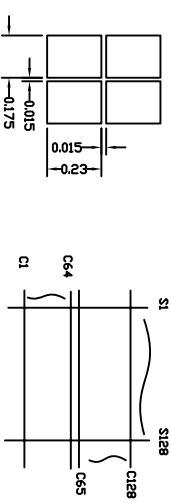

- | NOTES: | |
|--|--------------------------|
| 1. DISPLAY TYPE: | FSTN |
| 2. VIEWING DIRECTION: | 600 |
| 3. POLARIZER MODE: | TRANSPARENT/POSITIVE |
| 4. DRIVE METHOD: | 1/128 DUTY 1/12 BIAS |
| 5. LCD OPERATING VOLTAGE: | 12.3V |
| 6. VDD: | 3.0V |
| 7. OPERATING TEMP.: | -20°C ~ 70°C |
| 8. STORAGE TEMP.: | -30°C ~ 80°C |
| 9. CONTROLLER: | SE6B0741X01-30XN |
| 10. BACKLIGHT: | EL |
| 11. UNWAKED TOLERANCE: | ±0.30mm |
| 12. THE CONTROLLED DIMENSION MASK TO BE: | ☐ |

MULTI-INNO TECHNOLOGY CO., LTD				
DRAWN	BY:	TITLE: M128128B-T		
CHECKED	BY:			
APPROVED	BY:			
CONFIRMED BY:	DWG NAME:	M128128B-T G-3	SHEET NO: 1	OF 1