


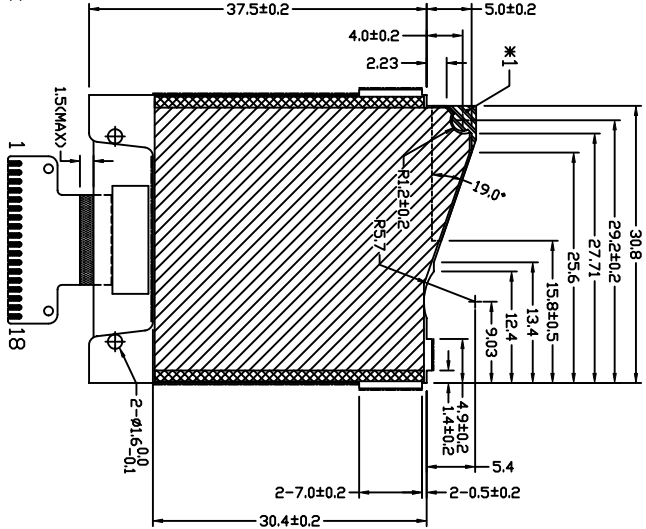


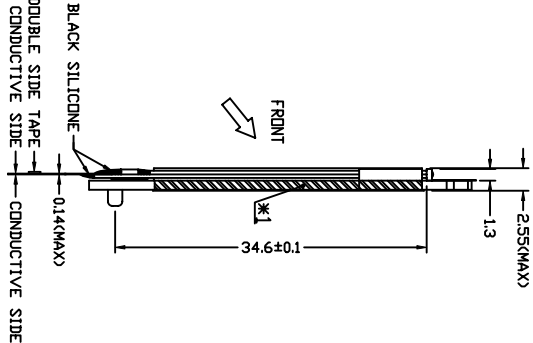


NO	PIN
1	/CS1
2	/RES
3	D/C
4	SCK
5	SDA
6	VDD
7	VSS
8	VOUT
9	C3N
10	C1P
11	C1N
12	C2N
13	C2P
14	VL2
15	VL3
16	VL4
17	VL5
18	VL6

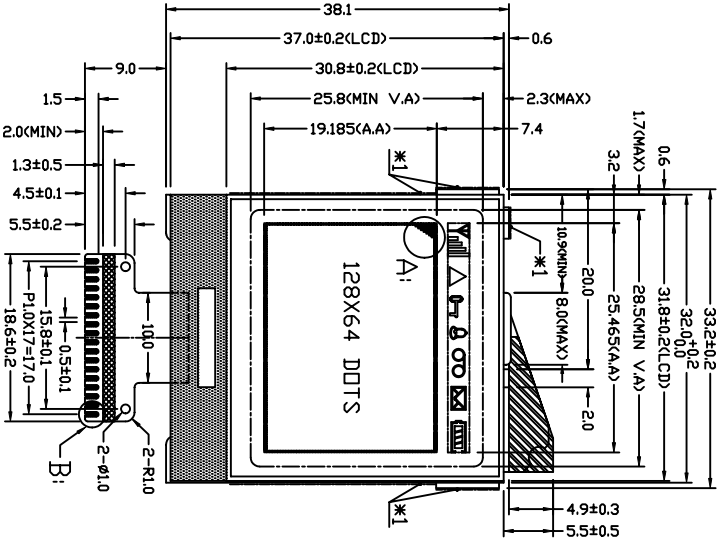


DOUBLE SIDE TAPE

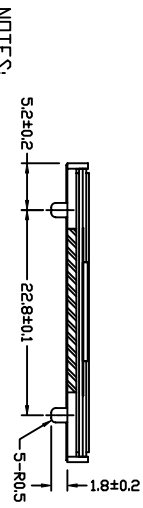


ALF



REFLECTOR



DETAIL A:



DETAIL B:

- NOTES:
1. DISPLAY TYPE: FSTN
 2. VIEWING DIRECTION: 6:00
 3. POLARIZER MODE: TRANSPARENT/POSITIVE
 4. LOGIC VOLTAGE: 2.8V
 5. LCD OPERATING VOLTAGE: 8.9V
 6. DRIVE METHOD: 1/65 DUTY 1/9 BIAS
 7. OPERATING TEMP: -20°C~+70°C
 8. STORAGE TEMP: -30°C~+80°C
 9. CONTROLLER: SSD1815BZ (ANTI-STATIC)
 10. WITH LED BACKLIGHT (DIES ON CUSTOMER'S BOARD)
 11. UNMARKED TOLERANCES: ±0.3mm
 12. *1 SHOWS ALF

MULTI-INNO TECHNOLOGY CO.,LTD.

DRAWN BY:	TITLE: M112864AB-G-1	SCALE:
CHECKED BY:	DWG NO: G-3	UNIT: mm
APPROVED BY:	DWG NAME:	
CONFIRMED BY:	SHEET NO: 1 OF 1	