
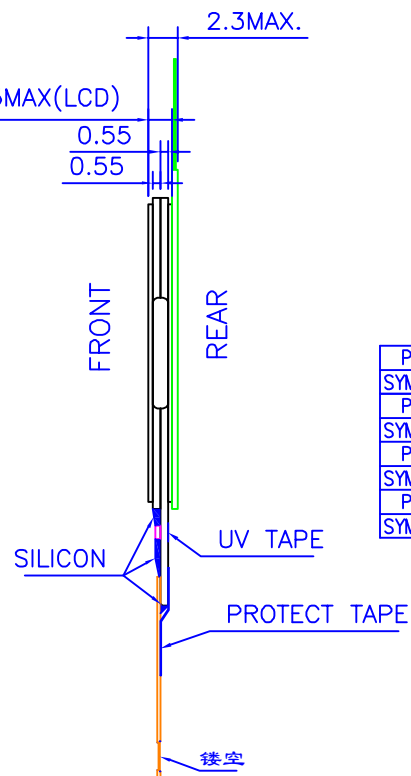


MI12864AC-G

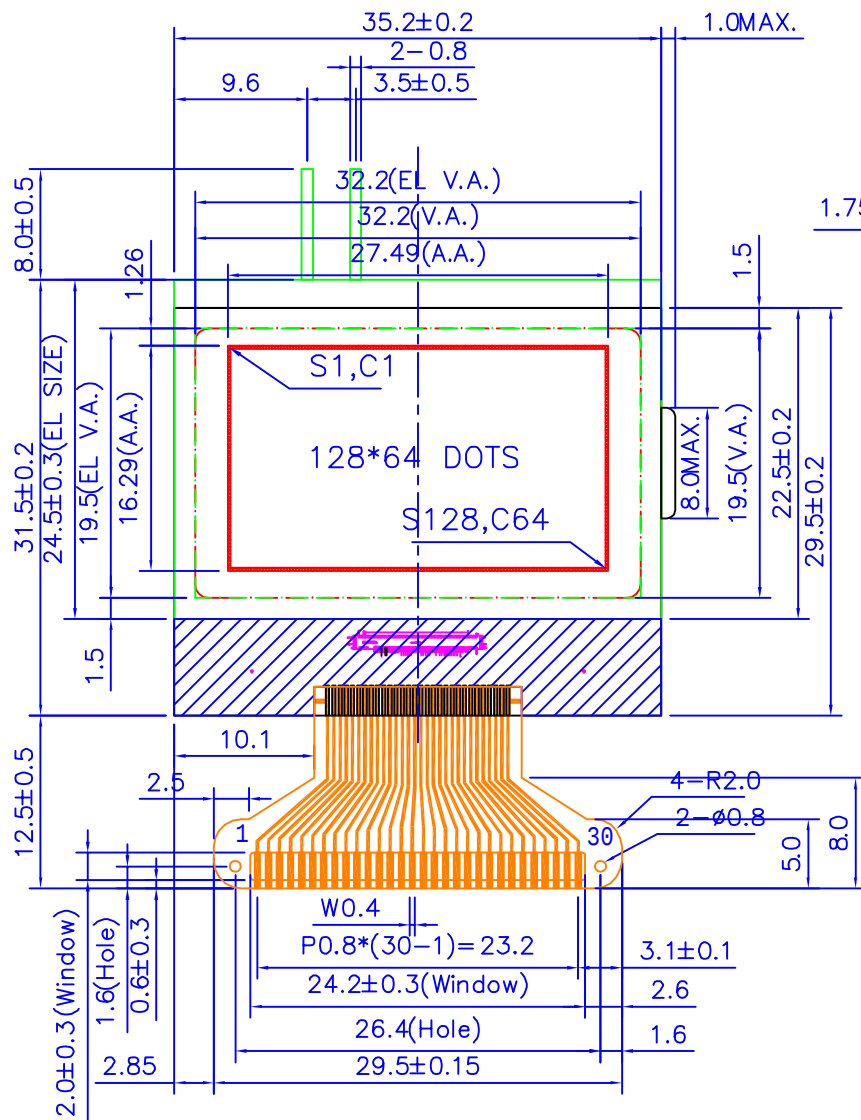

PIN	1	2	3	4	5	6	7	8
SYMBOL	IRS	P/S	C86	VR	V0	V1	V2	V3
PIN	9	10	11	12	13	14	15	16
SYMBOL	V4	C2N	C2P	C1P	C1N	C3P	VOUT	VSS
PIN	17	18	19	20	21	22	23	24
SYMBOL	VDD	D7	D6	D5	D4	D3	D2	D1
PIN	25	26	27	28	29	30		
SYMBOL	D0	RD	WR	A0	/RES	/CS1		

NOTE:

1. FSTN, POSITIVE, HIGH-TRANSFLECTIVE
2. 1/64 DUTY, 1/9BIAS, $V_{op.}=9.0V$, $V_{dd}=3.0V$
3. V.D:6:00
4. OP.TEMP:0°C-50°C
5. ST.TEMP:-20°C-60°C
6. Driver IC: ST7565P
7. EL BACKLIGHT: LIGHT-BLUE, $x=0.159$, $y=0.21$
BRIGHTNESS $\geq 20CD/M^2$, 110V, 400HZ

LCD PIN	ST7565P PIN
C1-C64	COM63-COM0
S1-S128	SEG0-SEG127