


MI12864AC-G

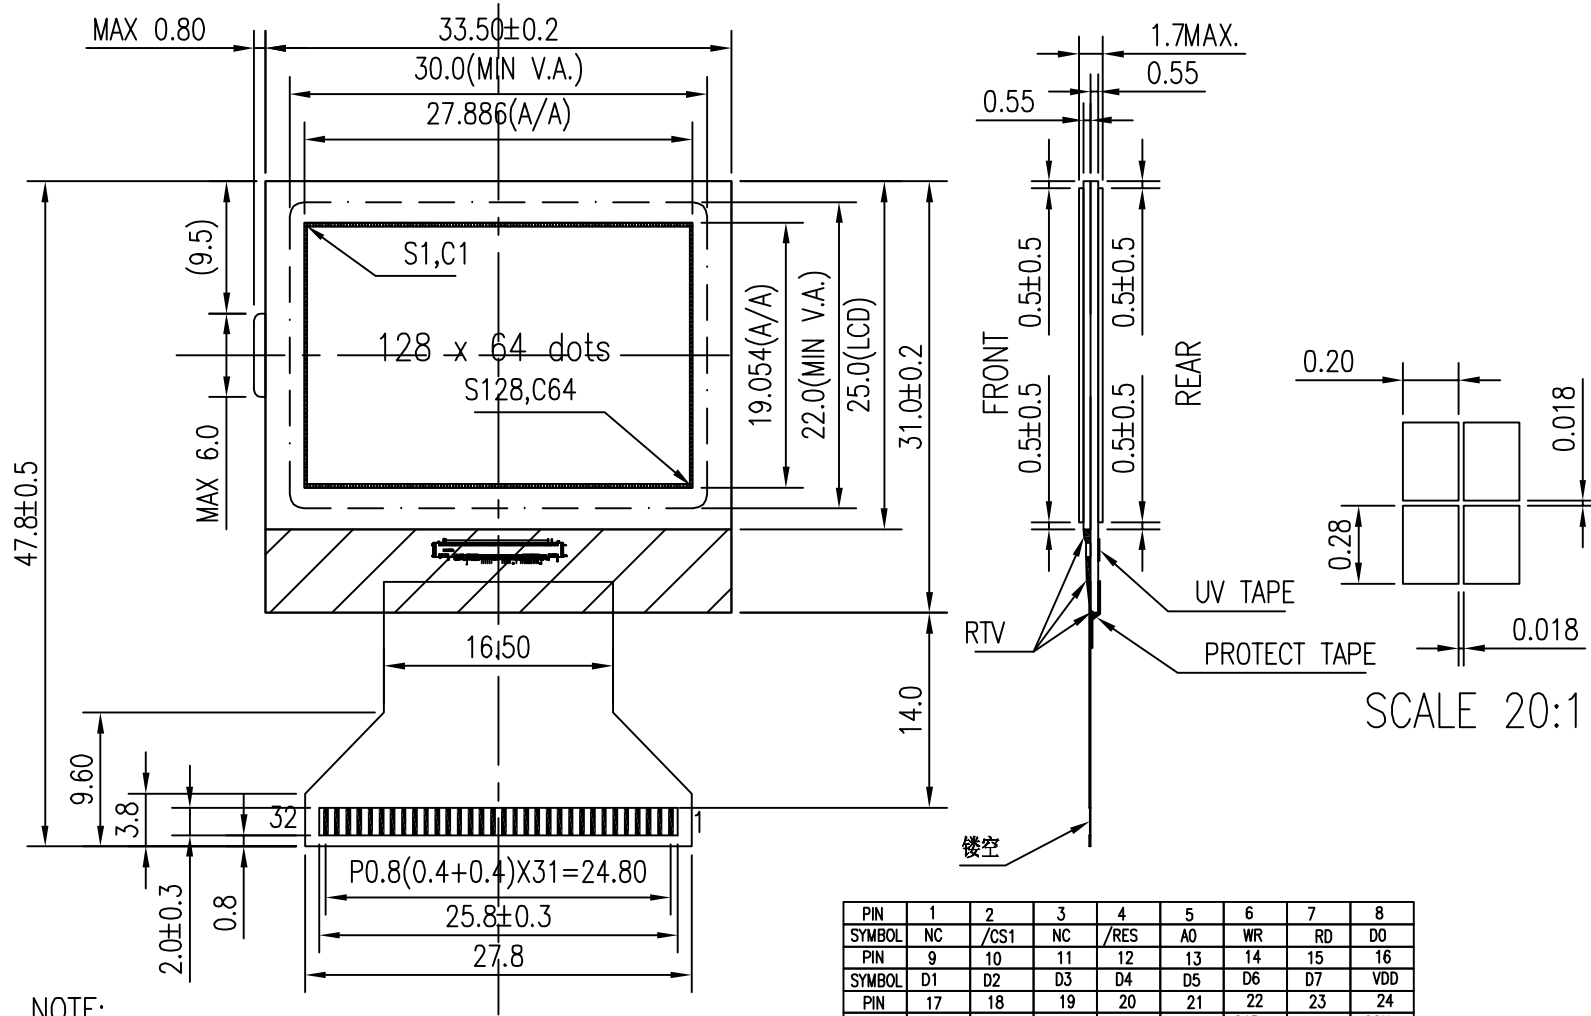

NOTE:

1. FSTN, POSITIVE,HIGH-TRANSFLECTIVE
2. 1/64 DUTY CYCLE, 1/9 BIAS,Vop.=9.0V,VDD=3.0V
3. VIEWING DIRECTION: 6:00 O'CLOCK
4. DRIVER IC: ST-7565P
5. Top.: -20 TO +70 DEGREE C
6. Tst.: -30 TO +80 DEGREE C

PIN	1	2	3	4	5	6	7	8
SYMBOL	NC	/CS1	NC	/RES	A0	WR	RD	D0
PIN	9	10	11	12	13	14	15	16
SYMBOL	D1	D2	D3	D4	D5	D6	D7	VD0
PIN	17	18	19	20	21	22	23	24
SYMBOL	VSS	VOUT	NC	C3P	C1N	C1P	C2P	C2N
PIN	25	26	27	28	29	30	31	32
SYMBOL	V4	V3	V2	V1	V0	VR	C86	NC

LCD PIN	IC PIN
C1–C64	COM63–COM0
S1–S128	SEG0–SEG127