
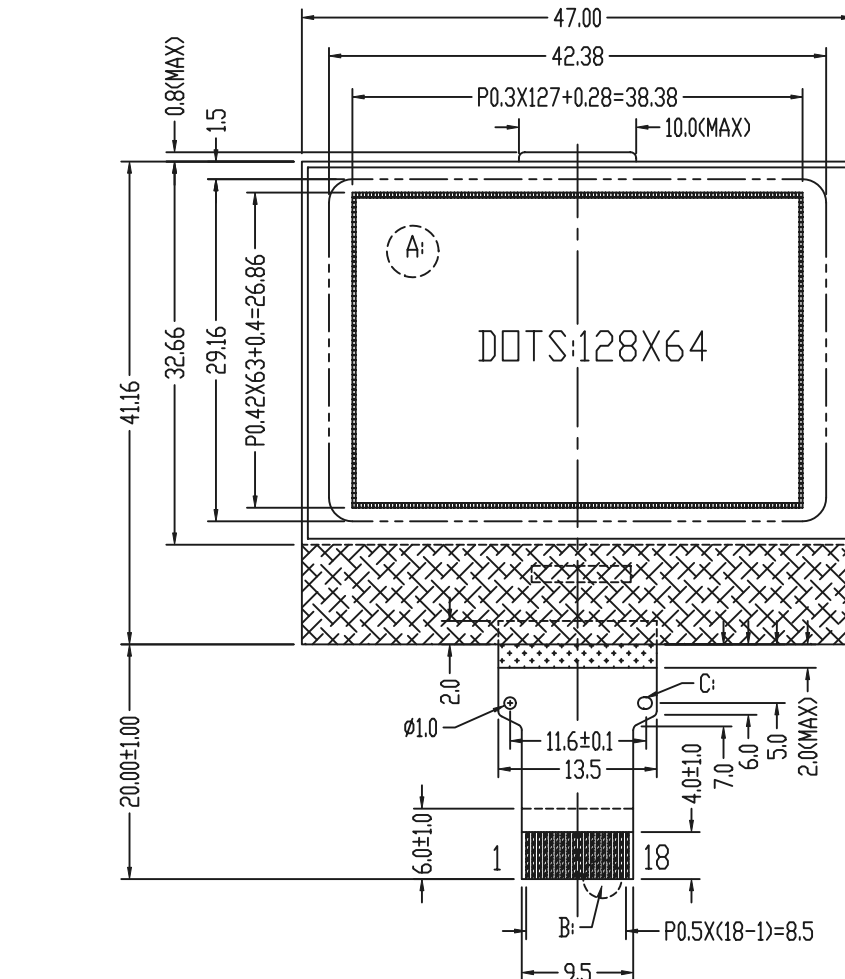
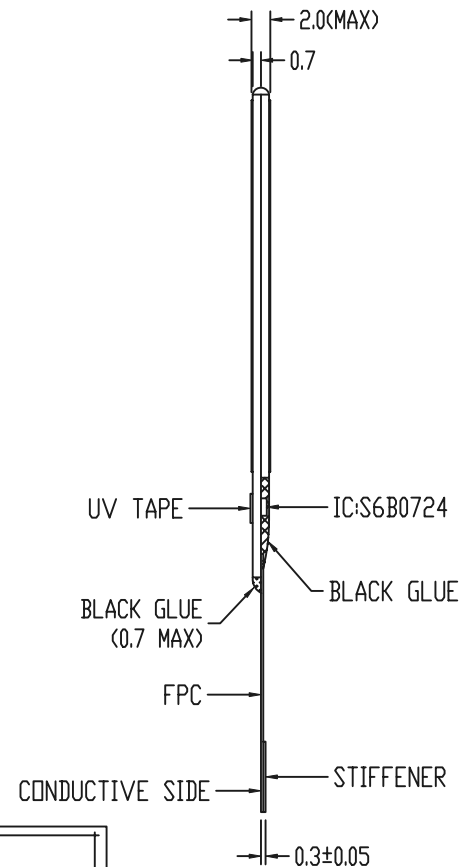



NOTES:

1. DISPLAY TYPE: FSTN
2. VIEWING DIRECTION: 6:00
3. POLARIZER MODE: TRANSFLECTIVE/POSITIVE
4. LOGIC VOLTAGE: 3.0V
5. LCD OPERATING VOLTAGE: 9.0V
6. DRIVE METHOD: 1/65 DUTY 1/9 BIAS
7. OPERATING TEMP.: -20 °C~+70°C
8. STORAGE TEMP.: -30 °C~+80°C
9. CONTROLLER: S6B0724A01-B0CY(KS0724UM-L4CC)
10. WITHOUT BACKLIGHT
11. UNMARKED TOLERANCES: ±0.3MM
12. THE MODULE CAN BE WATCHED WHILE WEARING SUNGLASS



NO.	PIN
1	/CS1
2	/RES
3	A0
4	SCL
5	SI
6	VDD
7	VSS
8	VOUT
9	C3+
10	C1-
11	C1+
12	C2+
13	C2-
14	V1
15	V2
16	V3
17	V4
18	V0

DETAIL C:



MULTI-INNO TECHNOLOGY CO.,LTD.

DRAWN BY:	TITLE: MI12864AH-G		
CHECKED BY:			
APPROVED BY:			DWG NO:
CONFIRMED BY:	DWG NAME:	SHEET NO: 1 OF 1	UNIT: mm