



Dimensional outline

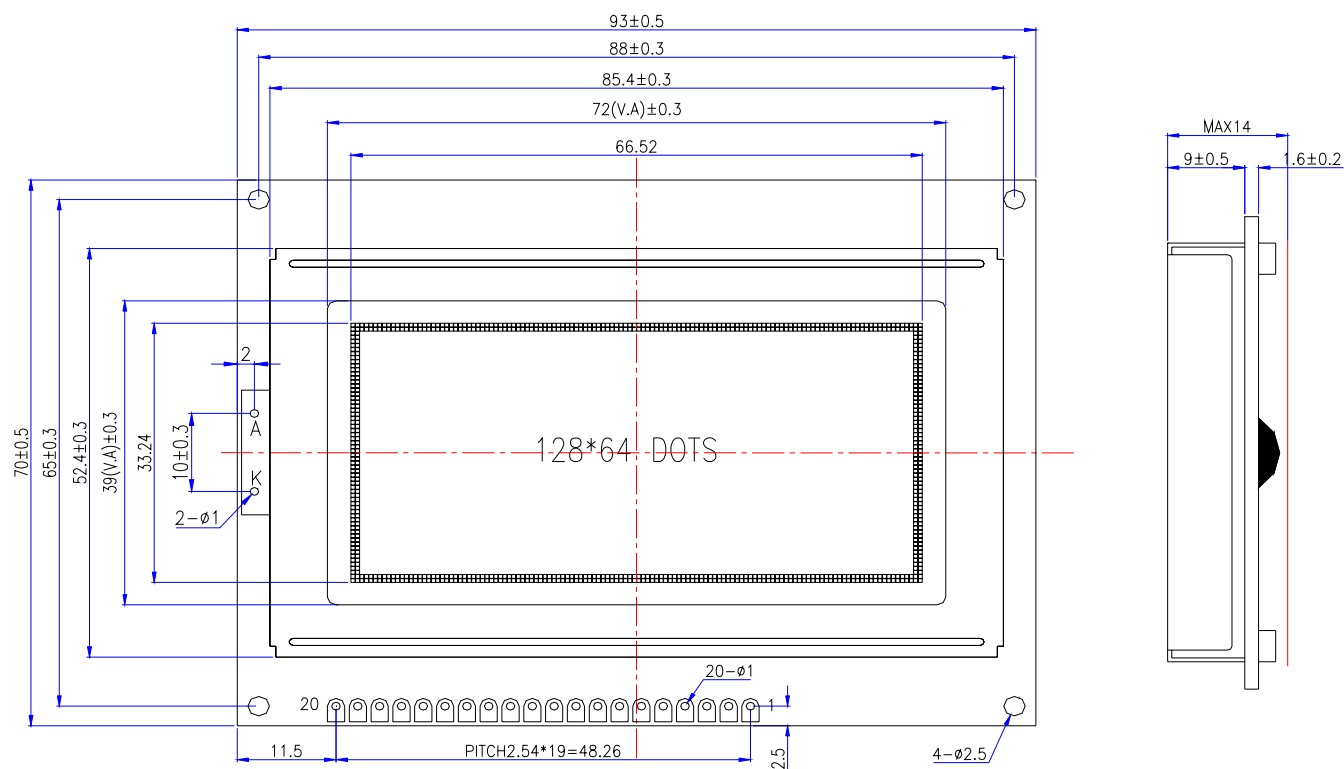

NOTES:

1. DISPLAY TYPE : 128X64 DOTS,1/64 DUTY,1/9 BIAS,VOP=10.5V.
STN, YELLOW-GREEN MODE, TRANSFLECTIVE/POSITIVE.
2. DRIVER: KS0107B and KS0108B
3. VIEWING DIRECTION: 6 O'CLOCK.
4. OPERATING TEMP: -0°C ~ 50°C.
5. STORAGE TEMP: -20°C ~ 70°C.
6. LED BACKLIGHT: YELLOW-GREEN ,BOTTOM
7. Unmarked Tolerance: ±0.5mm.

DISPLAY PATTERN



Pin Connections:

Pin NO.	Signal
1	VSS
2	VDD
3	V0
4	RS
5	R/W
6	E
7	DB0
8	DB1
9	DB2
10	DB3
11	DB4
12	DB5
13	DB6
14	DB7
15	/CS1
16	/CS2
17	RST
18	VOUT
19	LED+
20	LED-

BLOCK DIAGRAM:

