
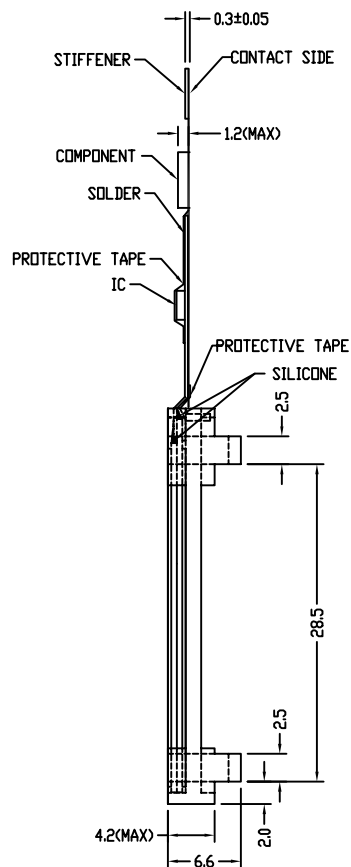
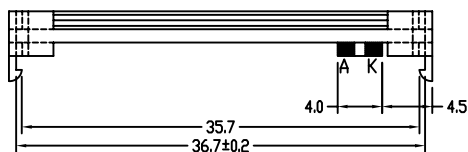
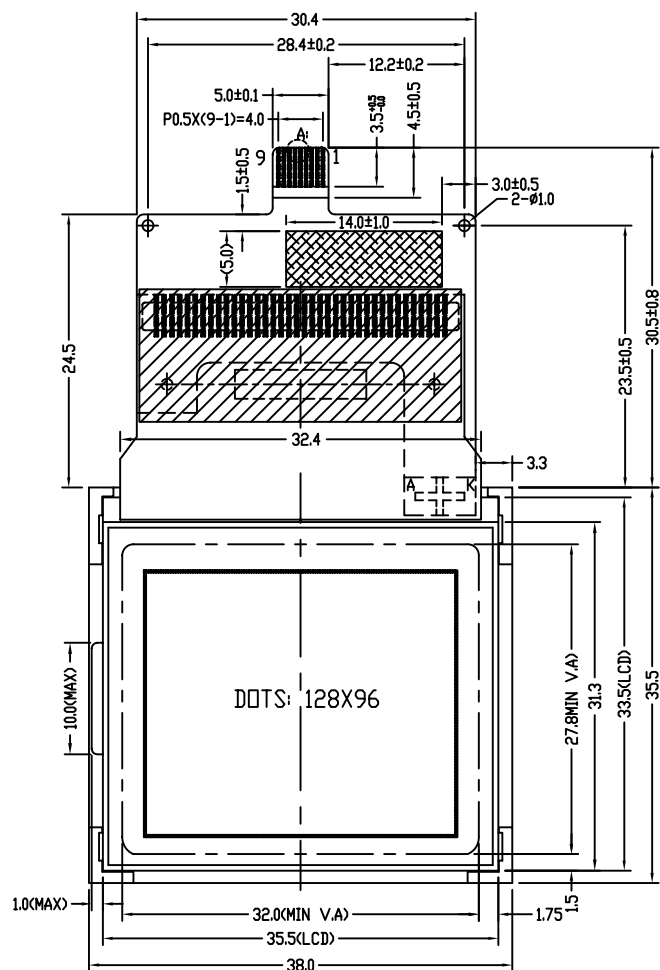



DETAIL A:



I/O DEFINE:

1	2	3	4	5	6	7	8	9
VSS	VDD	SDA	SCK	RS	RESETB	CSB	A	K

LCD LOGIC:

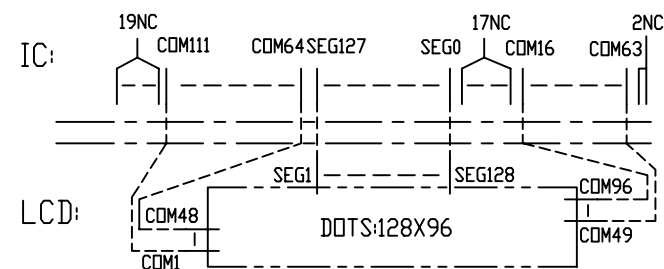

NOTES:

1. DISPLAY TYPE: FSTN
2. VIEWING DIRECTION: 6:00
3. POLARIZER MODE: TRANSFLECTIVE/POSITIVE
4. LOGIC VOLTAGE: 3.0V
5. LCD OPERATING VOLTAGE: 12.5V
6. DRIVE METHOD: 1/96 DUTY 1/11 BIAS
7. OPERATING TEMP.: -20°C~+70°C
8. STORAGE TEMP.: -30°C~+80°C
9. CONTROLLER: S6B0741-23
10. BACKLIGHT: LED (4 BLUE DIES)
11. UNMARKED TOLERANCES: ±0.3

MULTI-INNO TECHNOLOGY CO.,LTD.

DRAWN BY:	TITLE: MI12896A-T		
CHECKED BY:			
APPROVED BY:	DWG NO: G-4	SCALE:	
CONFIRMED BY:	DWG NAME: MI12896A-T G-4	SHEET NO: 1	OF 1