


### OUTLINE DIMENSION:

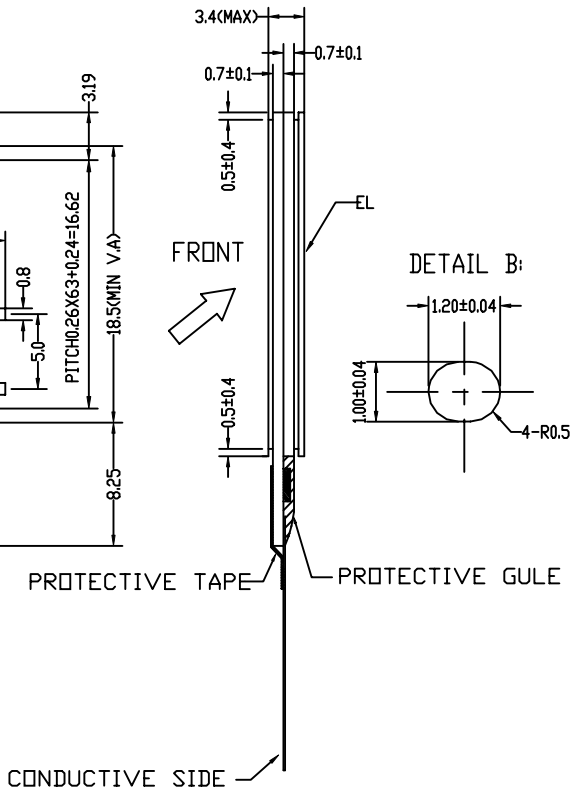

|    |        |
|----|--------|
| 1  | NC     |
| 2  | V0     |
| 3  | V4     |
| 4  | V3     |
| 5  | V2     |
| 6  | V1     |
| 7  | C2-    |
| 8  | C2+    |
| 9  | C1+    |
| 10 | C1-    |
| 11 | C3+    |
| 12 | C4+    |
| 13 | VOUT   |
| 14 | VSS    |
| 15 | VDD    |
| 16 | D7     |
| 17 | D6     |
| 18 | D5     |
| 19 | D4     |
| 20 | D3     |
| 21 | D2     |
| 22 | D1     |
| 23 | D0     |
| 24 | RDB    |
| 25 | WRB    |
| 26 | RS     |
| 27 | RESETB |
| 28 | CS1B   |
| 29 | NC     |

NOTES:

1. DISPLAY TYPE: FSTN
2. VIEWING DIRECTION: 600
3. POLARIZER MODE: TRANSFLECTIVE/POSITIVE
4. DRIVE METHOD: 1/65 DUTY 1/9 BIAS
5. LCD OPERATING VOLTAGE: 9.0V VDD=2.6~3.0V
6. OPERATING TEMP: 0°C~+50°C
7. STORAGE TEMP: -20°C~+60°C
8. CONTROLLER: S6B0724A01-B0CY(KS0724UM-L4CC)
9. CONNECTION: FPC
10. BACKLIGHT: EL(BLUE-GREEN)
11. UNMARKED TOLERANCE: ±0.3

DETAIL A:

