



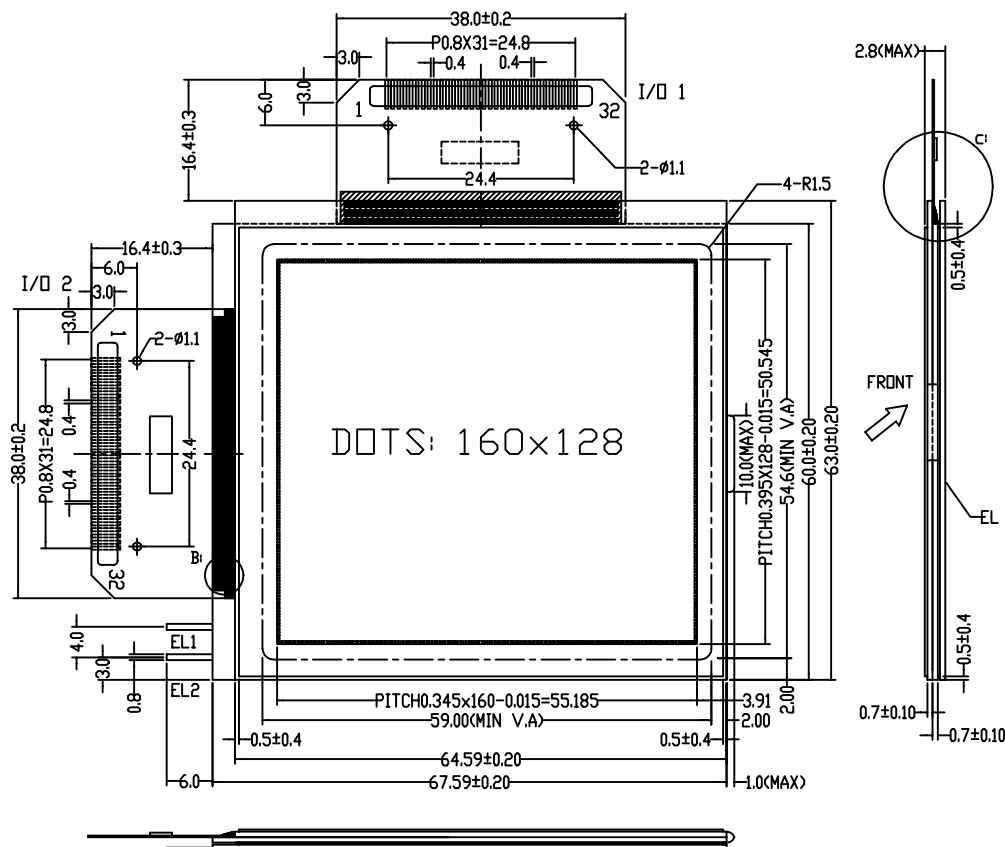


I/O 1 I/O 2:

PIN	SYMBOL	PIN	SYMBOL
1	DUMMY	17	D5
2	V0R	18	D4
3	V12R	19	D3
4	V43R	20	D2
5	V5R	21	D1
6	VSS	22	D0
7	TEST2	23	EIO2
8	TEST1	24	S/C
9	MD	25	VDD
10	FR	26	L/R
11	EIO1	27	VSS
12	LP	28	V5L
13	DISPOFF	29	V43L
14	XCK	30	V12L
15	D7	31	VOL
16	D6	32	DUMMY


DETAIL C:



DETAIL A:



DETAIL B:



NOTES:

1. DISPLAY TYPE: FSTN
2. VIEWING DIRECTION: 6:00
3. POLARIZER MODE: TRANSFLECTIVE/POSITIVE
4. DRIVE METHOD: 1/128 DUTY 1/12 BIAS
5. LCD OPERATING VOLTAGE: 16.0V
6. OPERATING TEMP.: -20°C~+70°C
7. STORAGE TEMP.: -30°C~+80°C
8. IC: NT7701H-TABF3 x 2
9. VDD=5.0V
10. BACKLIGHT: EL(BLUE)
11. UNMARKED TOLERANCES: ±0.3mm