



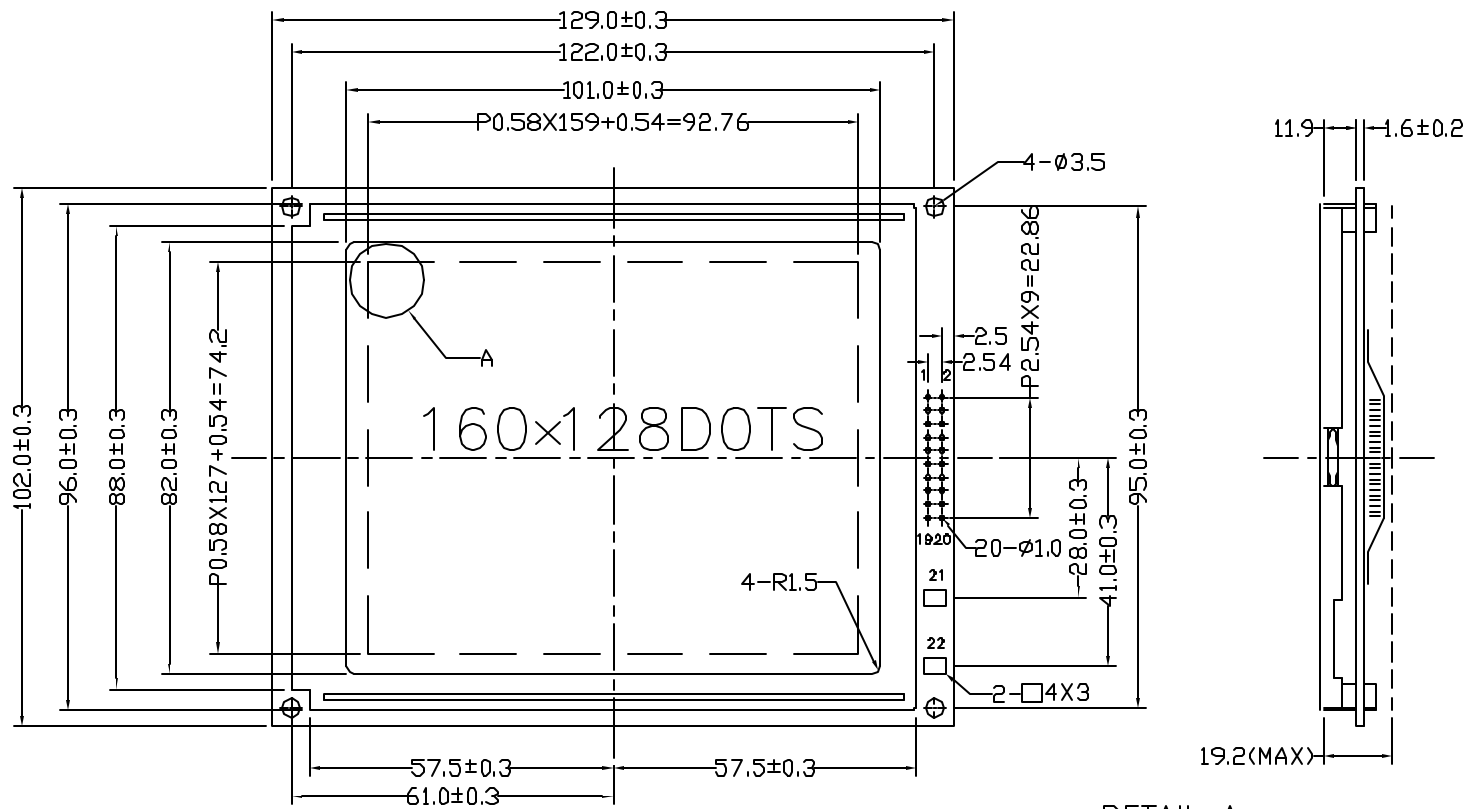

DETAIL A:



1	2	3	4	5	6	7	8	9	10	11
FG	VSS	VDD	VCOM	VEE	WR	RD	CE	C/D	HALT	RESET
12	13	14	15	16	17	18	19	20	21	22
DO	D1	D2	D3	D4	D5	D6	D7	NC	LED1	LED2

NOTE:

- | | |
|----------------------------|------------------------|
| 1. DISPLAY TYPE: | STN/Y-G MODE |
| 2. VIEWING DIRECTION: | 6:00 |
| 3. POLARIZER MODE: | TRANSFLECTIVE/POSITIVE |
| 4. DRIVE METHOD: | 1/128 DUTY 1/12 BIAS |
| 5. LCD OPERATING VOLTAGE: | 15.0V |
| 6. OPERATING TEMP: | -20°C~+70°C |
| 7. STORAGE TEMP: | -30°C~+80°C |
| 8. CONTROLLER: | T6963C |
| 9. BACKLIGHT: | LED |
| 10. BEZEL IS TO BE PAINTED | BLACK |
| 11. UNMARKED TOLERANCE: | ±0.3MM |

MULTI-INNO TECHNOLOGY CO.,LTD.

DRAWN BY:	TITLE: MI160128A	
CHECKED BY:	DWG NO: G-1	
APPROVED BY:	DWG NAME:	
CONFIRMED BY:	SHEET NO: OF	