

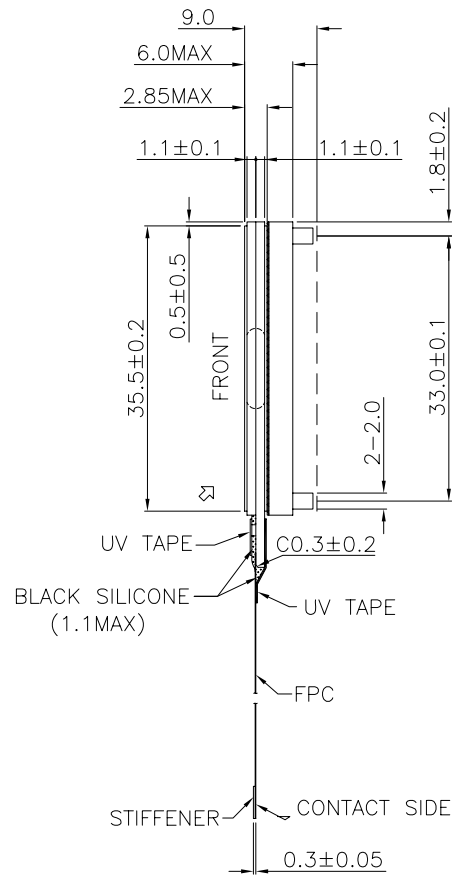


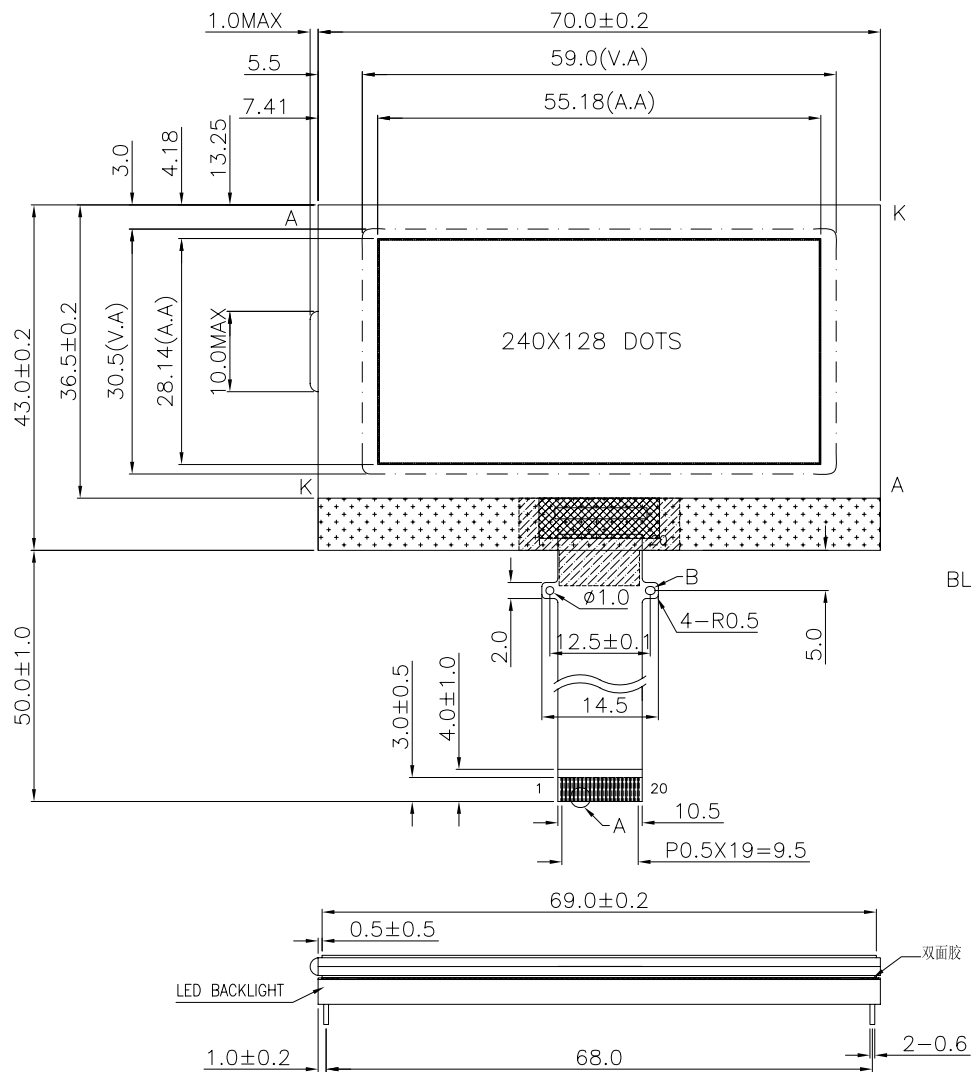


PIN CONNECTION:

PIN	SYMBOL
1	NC
2	NC
3	NC
4	NC
5	NC
6	NC
7	VB1-
8	VB1+
9	VB0-
10	VB0+
11	NC
12	VLCD
13	VSS
14	VDD
15	SDA
16	SCK
17	CD
18	RST
19	CS
20	NC


DISPLAY PATTERN



DETAIL A



DETAIL B



NOTES:

1. DISPLAY TYPE: FSTN, TRANSFLECTIVE/POSITIVE.
2. DRIVE METHOD: 1/128DUTY, 1/12BIAS, VOP=14.0V, VDD=3.3V
3. VIEWING DIRECTION: 6 O'CLOCK.
4. IC DRIVER: UC1608XGBE.
5. OPERATING TEMP: -20°C ~ 70°C.
6. STORAGE TEMP: -30°C ~ 80°C.
7. LED BACKLIGHT: YELLOW-GREEN EDGE LEDA-LEDK=4.2±0.2V.
8. ALL UNMARKED TOLERANCES: ±0.3.
9. RoHS COMPLIANT.

CUSTOMER APVL		DATE	
DRAWN		SCALE	TITLE
DFTG CHK		UNIT	MI240128B-G
ENGR CHK		mm	
APPROVAL			MODEL
MULTI-INNO TECHNOLOGY CO.,LTD.			DWG NO
			PAGE
			1/1

VERSION MODIFYCONTENT