


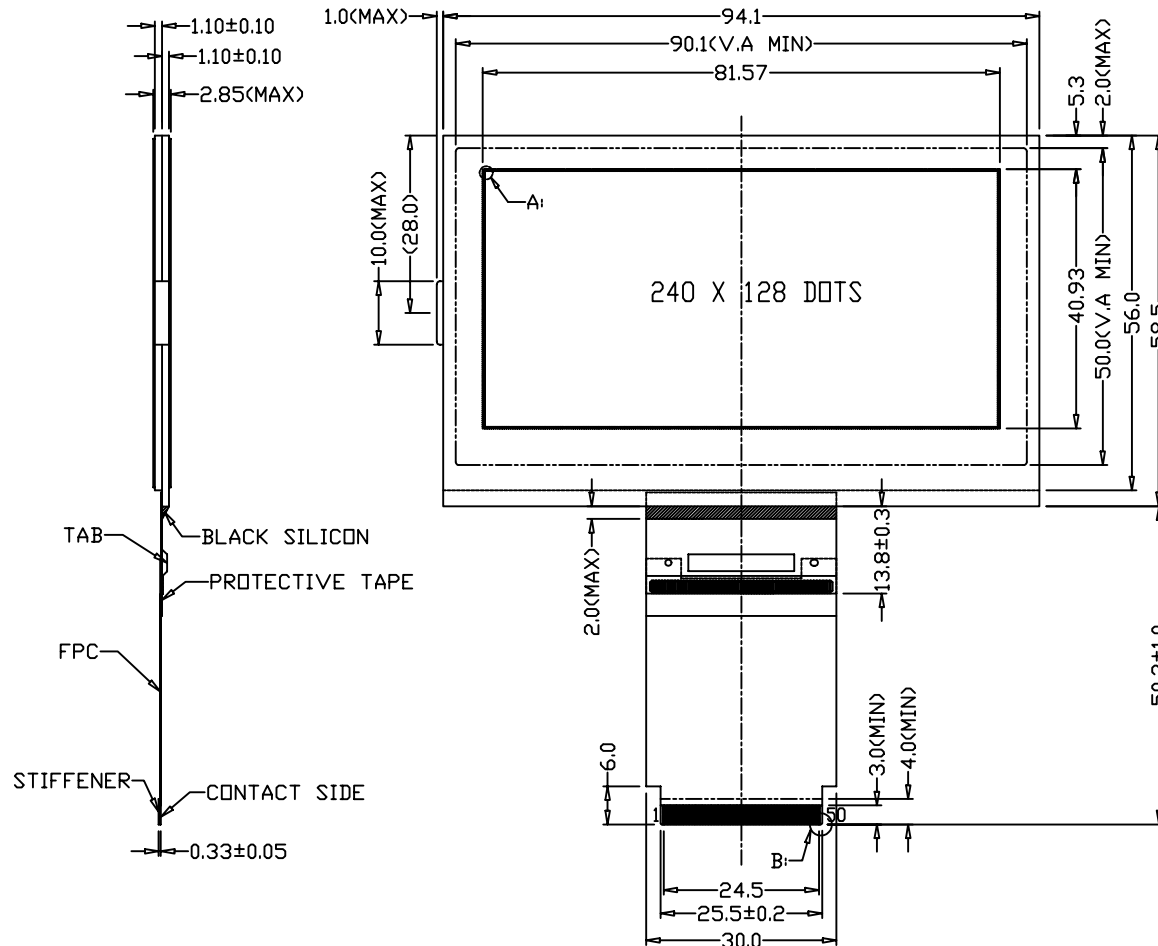


PIN	SYMBOL	PIN	SYMBOL	PIN	SYMBOL	PIN	SYMBOL
1	NC	16	VREF	31	D11	46	CSB
2	C5-	17	VREG	32	D10	47	RESB
3	C5+	18	V4	33	D9	48	P/S
4	C4-	19	V3	34	D8	49	SEL68
5	C4+	20	V2	35	D7	50	NC
6	C3-	21	V1	36	D6		
7	C3+	22	VLCD	37	D5		
8	C2-	23	VSS	38	D4		
9	C2+	24	OSC2	39	D3		
10	C1-	25	OSC1	40	D2		
11	C1+	26	VDD	41	D1		
12	VEE	27	D15	42	D0		
13	VOUT	28	D14	43	RDB		
14	VSSH	29	D13	44	WRB		
15	VBA	30	D12	45	RS		

NOTES:

1. DISPLAY TYPE: STN/YELLOW-GREEN MODE
2. VIEWING DIRECTION: 6:00
3. POLARIZER MODE: TRANFLECTIVE/POSITIVE
4. DRIVE METHOD: 1/128 DUTY 1/12 BIAS
5. LCD OPERATING VOLTAGE: 15.0V
6. LOGIC VOLTAGE: 3.0V
7. OPERATING TEMP.: -20°C~+70°C
8. STORAGE TEMP.: -30°C~+80°C
9. CONTROLLER: NJU6815H01
10. WITHOUT BACKLIGHT
11. ALL UNMARKED TOLERANCES: ±0.30mm

DETAIL B:



DETAIL A:

