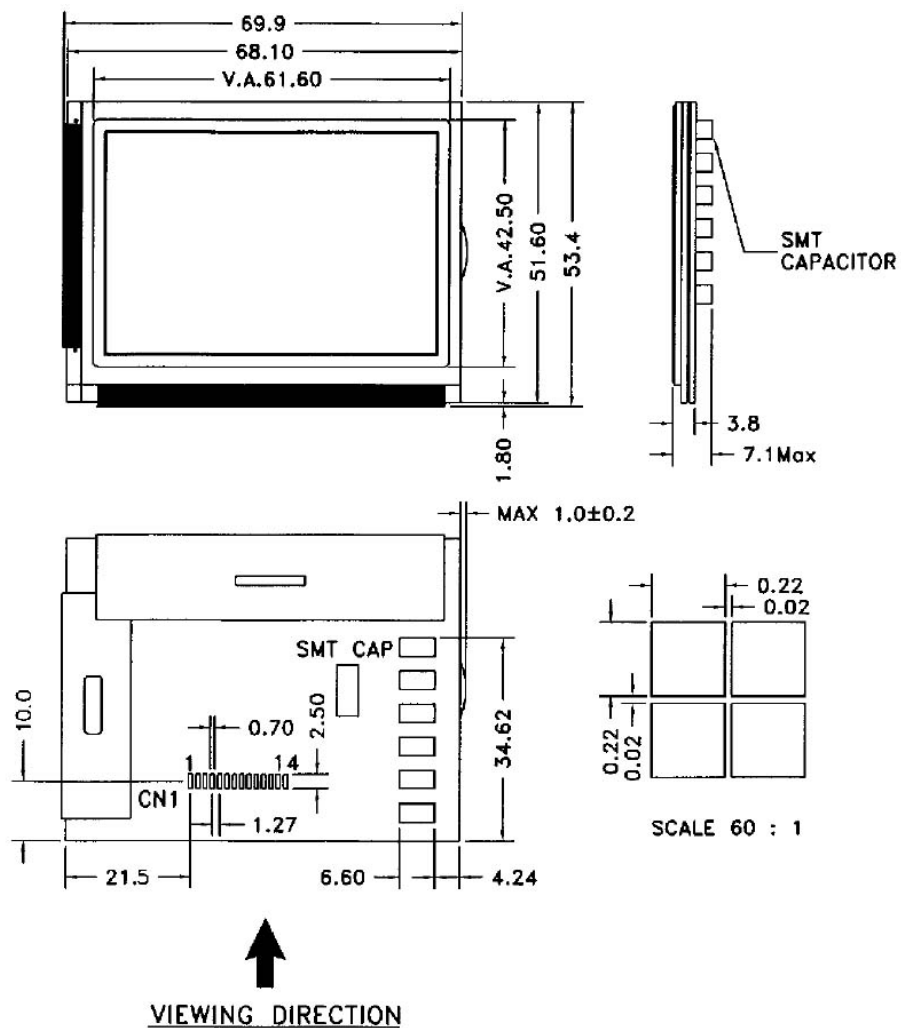
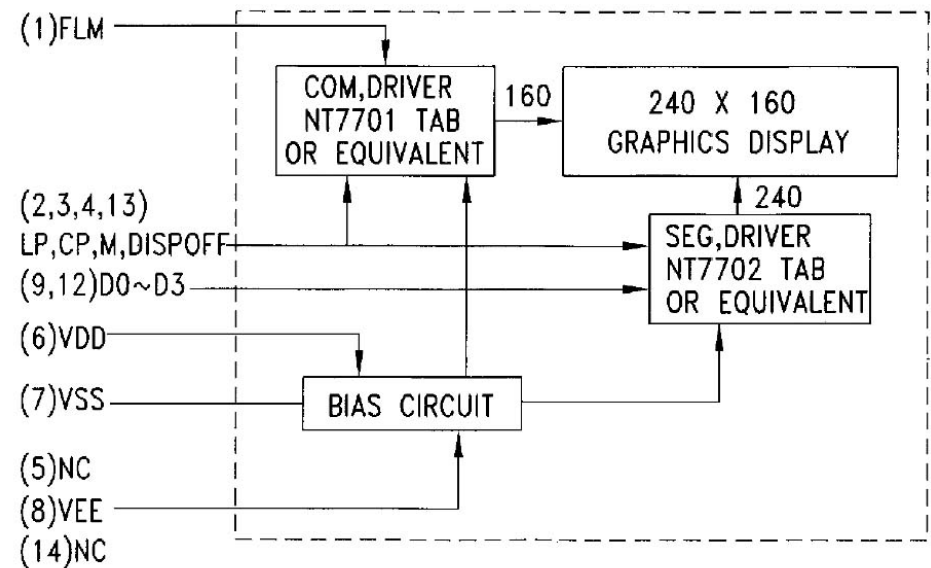


GENERAL DESCRIPTION

Display mode : 240 x 160 dots, graphic TAB LCD module; Reflective/No backlight.
 Interface : 4-bit parallel
 Driving method : 1/160 duty, 1/13 bias
 Controller IC : Novatek NT7701, NT7702 or equivalent

For the detailed information, please refer to the IC specifications.

FIGURE 1. COUNTER DRAWING FOR GENERAL MODULE**FIGURE 2. BLOCK DIAGRAM.**

pin	1	2	3	4	5	6	7	8
symbol	FLM	LP	CP	M	NC	VDD	VSS	VEE
pin	9	10	11	12	13	14		-
symbol	DB0	DB1	DB2	DB3	DISPOFF	NC		-