
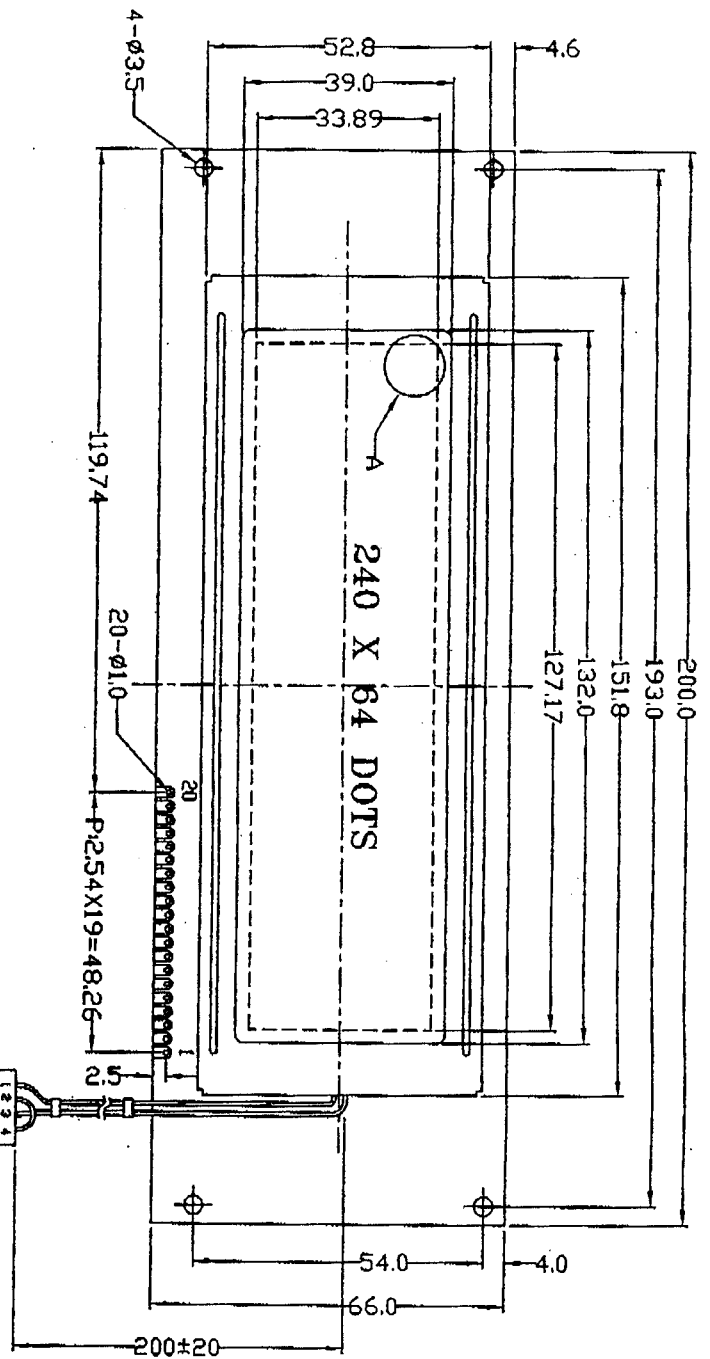


DETAIL A:



CN1:

|    |     |     |     |    |    |    |     |    |     |     |     |     |     |     |     |     |     |    |    |
|----|-----|-----|-----|----|----|----|-----|----|-----|-----|-----|-----|-----|-----|-----|-----|-----|----|----|
| 1  | 2   | 3   | 4   | 5  | 6  | 7  | 8   | 9  | 10  | 11  | 12  | 13  | 14  | 15  | 16  | 17  | 18  | 19 | 20 |
| FG | GND | VDD | VEE | WR | RD | CE | C/D | NC | RET | DB0 | DB1 | DB2 | DB3 | DB4 | DB5 | DB6 | DB7 | FS | NC |

CN2:

|         |    |         |    |
|---------|----|---------|----|
| 1       | 2  | 3       | 4  |
| CCFLHOT | NC | CCFLGND | NC |

## NOTES:

1. DISPLAY TYPE: STN/BLUE MODE
2. VIEWING DIRECTION: 6.00
3. POLARIZER MODE: TRANSMISSIVE/NEGATIVE
4. OPERATING TEMP.: 0°C-50°C
5. STORAGE TEMP.: -20°C-60°C
6. LCD OPERATING VOLTAGE: 13.0V
7. DRIVE METHOD: 1/64 DUTY 1/9 BIAS
8. CONTROLLER: T6963C
9. BACKLIGHT: CCFL
10. ALL UNMARKED TOLERANCES: ±0.3mm
11. CN2(BACKLIGHT'S CONNECTOR) IS MOLEX 10-01-3046
12. BEZEL MATERIAL: STAINLESS STEEL

MULTI-INNO TECHNOLOGY CO., LTD

|               |                 |        |
|---------------|-----------------|--------|
| DRAWN BY:     | TITLE: MI24064E | SCALE: |
| CHECKED BY:   | DATE: G-4       | UNIT:  |
| APPROVED BY:  |                 |        |
| CONTINUED BY: |                 |        |