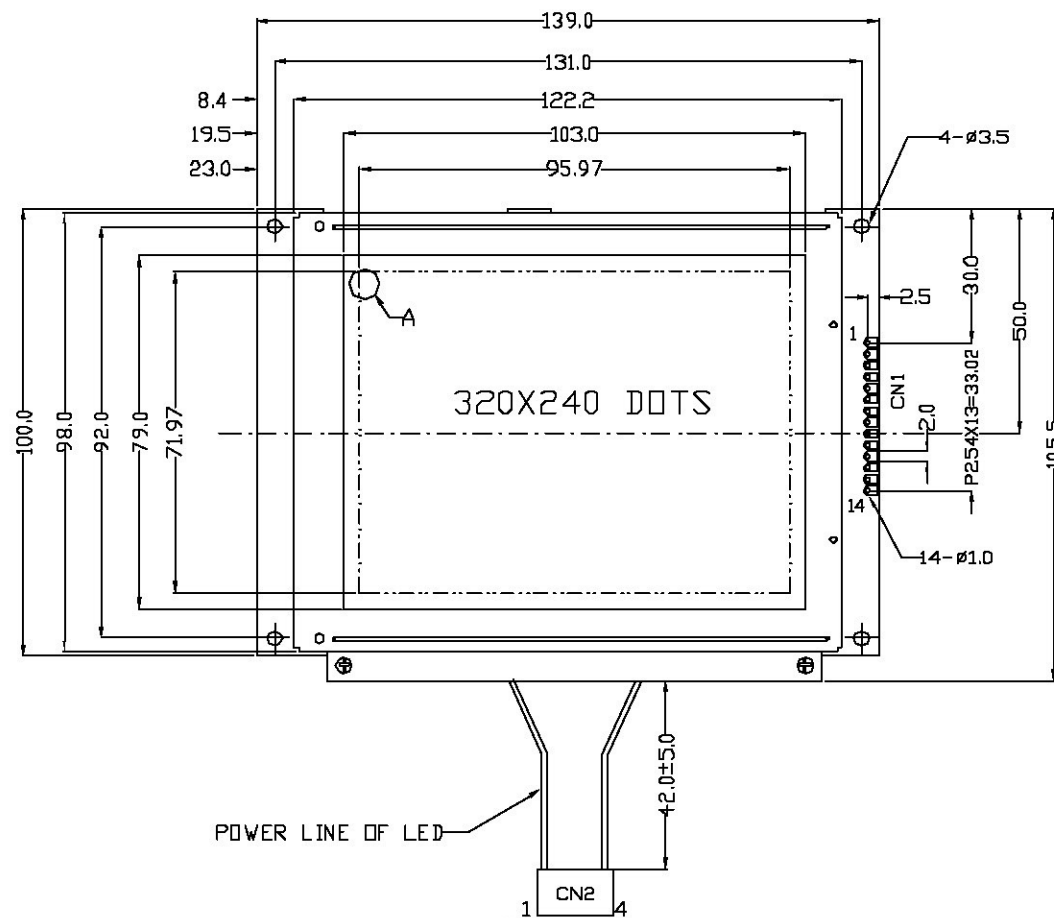


CN1

1	FLM
2	LP
3	CP
4	M
5	VADJ
6	VCC
7	VSS
8	VEE
9	D0
10	D1
11	D2
12	D3
13	D.off
14	NC


CN2

1	A
2	NC
3	NC
4	K

NOTES:

- | | |
|--|-----------------------|
| 1. DISPLAY TYPE: | B/W, FSTN MODE |
| 2. VIEWING DIRECTION: | 6:00 |
| 3. POLARIZER MODE: | TRANSMISSIVE/NEGATIVE |
| 4. OPERATING TEMP.: | -20°C-70°C |
| 5. STORAGE TEMP.: | -40°C-80°C |
| 6. VDD: | 5.0V |
| 7. LCD OPERATING VOLTAGE: | 25.4V |
| 8. DRIVE METHOD: | 1/240 DUTY 1/16 BIAS |
| 9. DRIVER: | S6B2086X01-TORA |
| 10. BACKLIGHT: | LED(4.0V WHITE) |
| 11. ALL UNMARKED TOLERANCES: ±0.3mm | |
| 12. BEZEL IS TO BE PAINTED WITH ZINC(WHITE) | |
| 13. BACKLIGHT CONNECTOR(CN2): IL-G-4S-S3C2 JAE | |

DETAIL A:



MULTI-INNO TECHNOLOGY CO., LTD

DRAWN BY:	TITLE: MI320240S	
CHECKED BY:	DWG NO: G-1	
APPROVED BY:	DWG NAME: MI320240S G-1	SCALE: mm
CONFIRMED BY:	SHEET NO: 1 OF 1	