


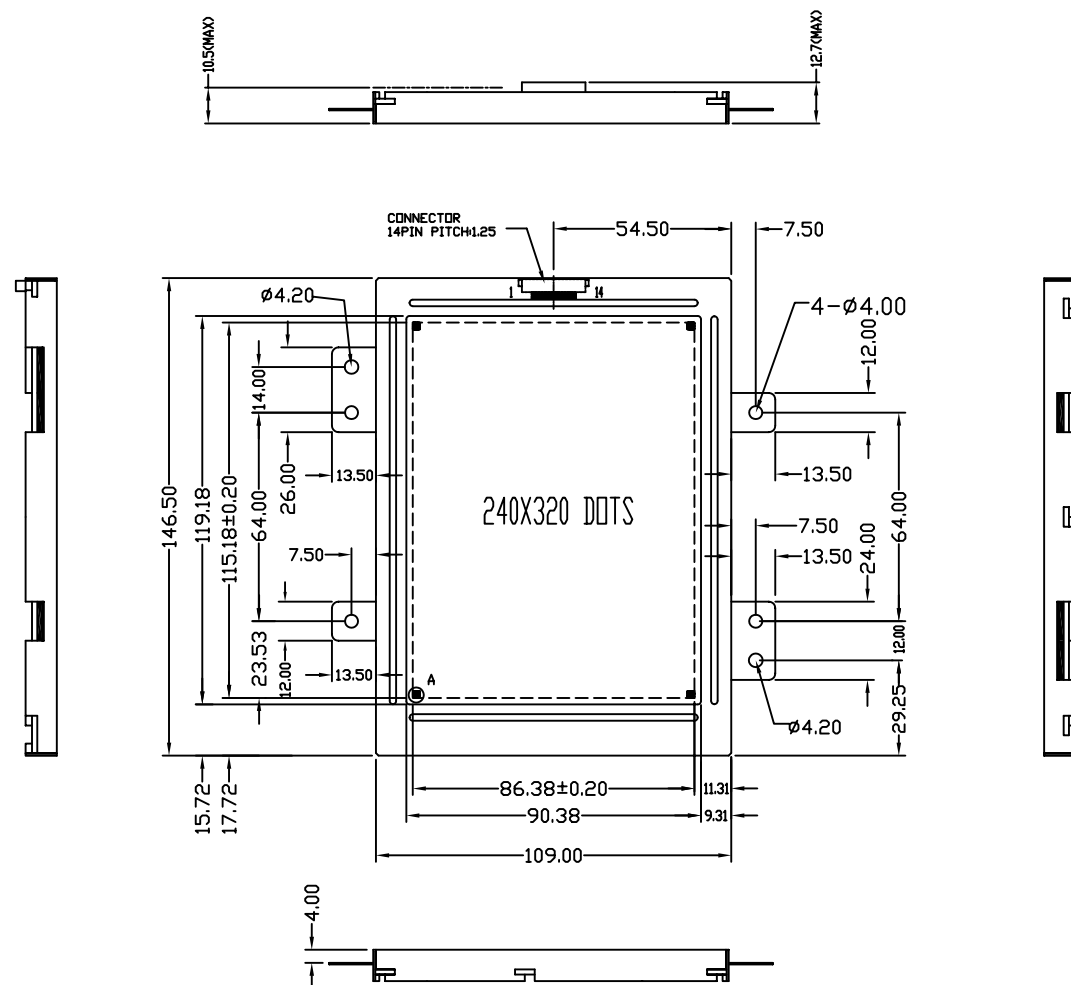


I/O PORTS

NO.	SYMBOL
1	VDD
2	VSS
3	/DOFF
4	YD
5	LP
6	XSCL
7	XD0
8	XD1
9	XD2
10	XD3
11	V0
12	VEE
13	LED+
14	LED-

NOTES:

1. DISPLAY TYPE: FSTN MODE
2. VIEWING DIRECTION: 6:00
3. POLARIZER MODE: TRANSFLECTIVE/POSITIVE
4. DRIVE METHOD: MLA(FOUR LINES)
5. VDD=3.3VDC
6. LCD OPERATING VOLTAGE: 25.0V
7. OPERATING TEMP: -25°C~+70°C
8. STORAGE TEMP: -30°C~+80°C
9. DRIVER: COM DRIVER: SSD1882T1R, SEG DRIVER: SSD1870T2RX2
10. BACKLIGHT: LED(WHITE, 4 CHIPS)
11. UV-CUT LCD & ANTI-HUMIDITY, ANTI-MILDEW AND ANTI-SALTFOG PCB
12. BEZEL IS TO BE PAINTED WHITE.
13. ALL UNMARKED TOLERANCES: $\pm 0.30\text{mm}$

DETAIL A:



MULTI-INNO TECHNOLOGY CO.,LTD.

DRAWN BY:	TITLE: MI320240W-T	
CHECKED BY:		
APPROVED BY:	DWG NO:	SCALE:
		UNIT: mm
CONFIRMED BY:	DWG NAME:	SHEET NO: 1 OF 1