



External dimensions

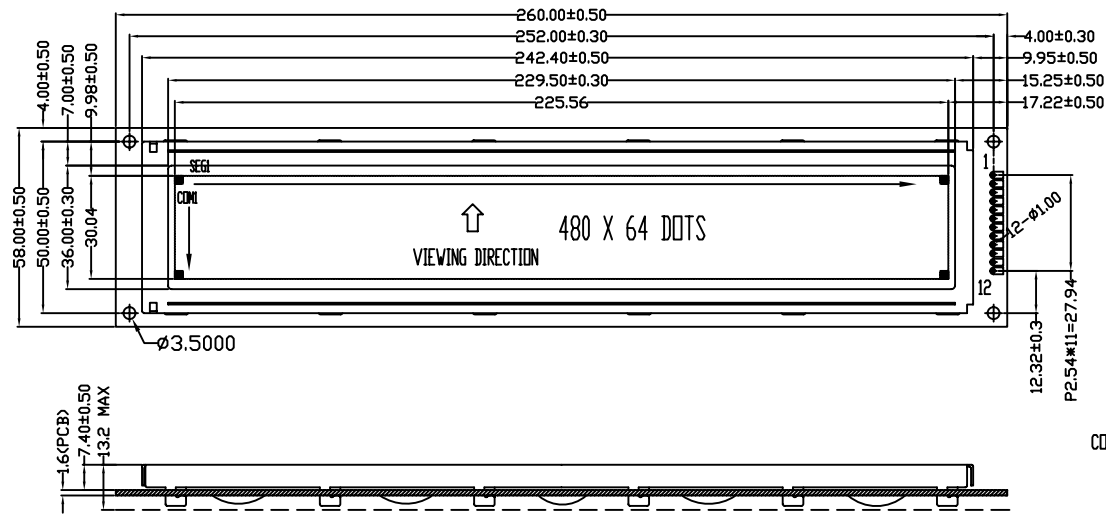


1	2	3	4	5	6	7	8	9	10	11	12
D	FLM	M	CL1	CL2	NC	VDD	VSS	VEE	VO	SLA	SLK

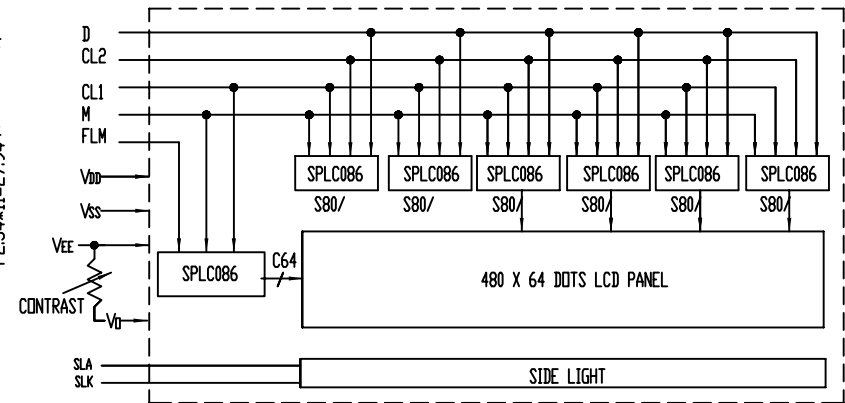

NOTES:

1. OPERATING TEMPERATURE: -20°C TO 70°C
STORAGE TEMPERATURE: -30°C TO 80°C
2. LCD MODEL: FSTN/POSITIVE/TRANSMISSIVE
3. DUTY=1/64, BAIS=1/9, VDD=5V, VLcd=13.2V
4. BACKLIGHT: YELLOW-GREEN LED, Vf=2.1V, If=570*2mA
5. RoHS Compliant
6. TOLERANCE: DECIMAL .X ± 0.50;
.XX ± 0.50;
° ± 1/4°



DOTS DETAIL

CUSTOMER APVL		DATE	
DRAWN	2007-06-30	SCALE	TITLE
DFTG CHK		UNIT	
ENGR CHK		mm	
APPROVAL			
			MODEL
			MI48064C-2
		DWG NO	PAGE
		MI48064C-2G-1	1/1

VERSION	MODIFYCONTENT
---------	---------------

MULTI-INNO TECHNOLOGY CO.,LTD.