



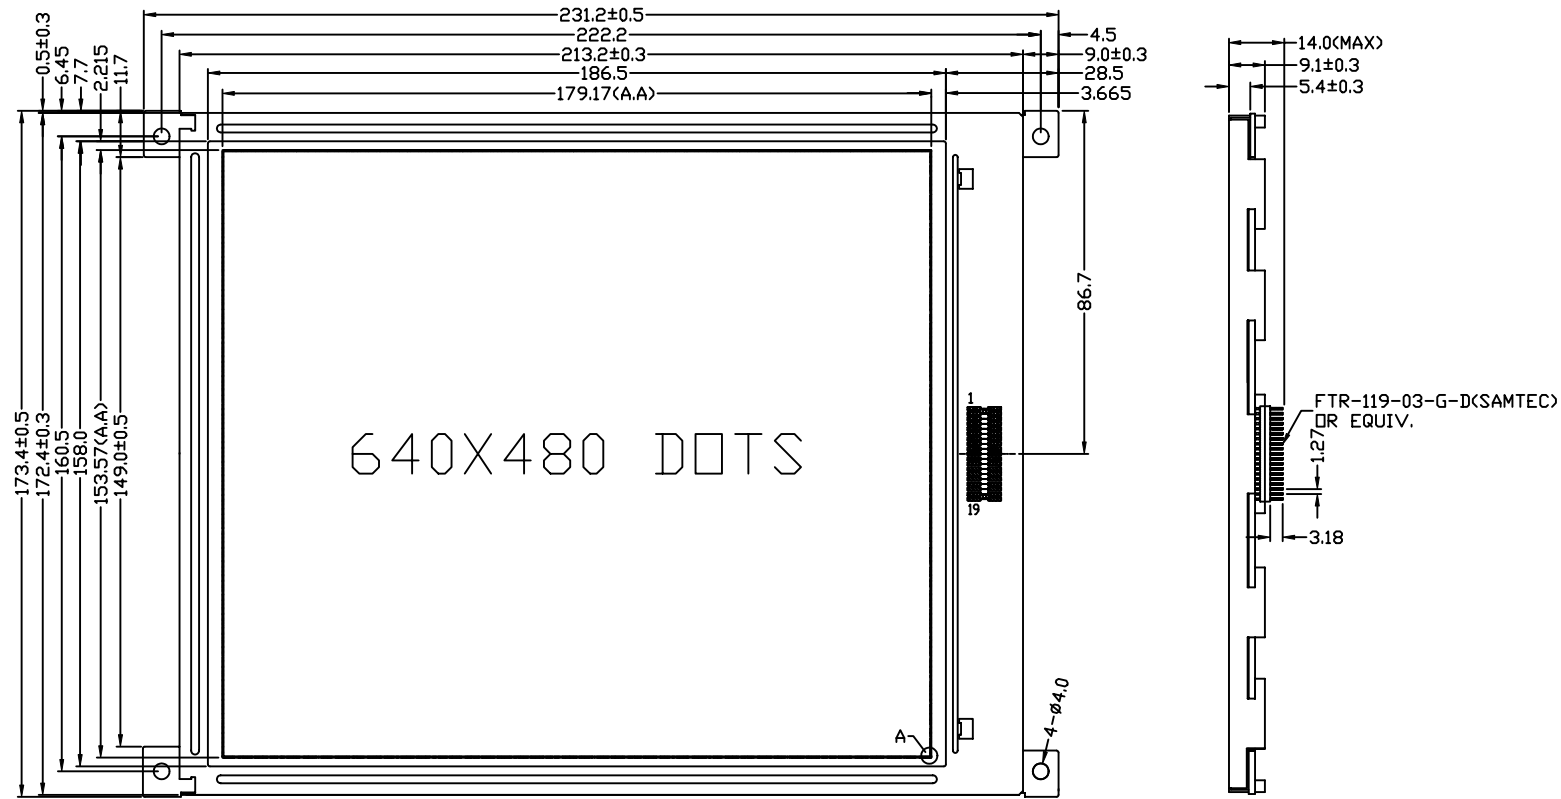

DETAIL A:



NOTES:

- DISPLAY TYPE: FSTN(DUAL SCAN)
- VIEWING DIRECTION: 6:00
- POLARIZER MODE: TRANSFLECTIVE/POSITIVE
- OPERATING TEMP: $-20^{\circ}\text{C} \sim +70^{\circ}\text{C}$
- STORAGE TEMP: $-30^{\circ}\text{C} \sim +80^{\circ}\text{C}$
- DRIVE METHOD: 1/240 DUTY 1/13 BIAS
- BACKLIGHT TYPE: LED(WHITE;POWER DISSIPATION: $<300\text{mW}$)
- DRIVER: S6B0794X01-07(X11)
- LCD OPERATING VOLTAGE: 23.3V
- LOGIC VOLTAGE: 3.3V
- UV-CUT LCD & ANTI-HUMIDITY, ANTI-MILDEW AND ANTI-SALTFOG PCB
- BEZEL IS TO BE PAINTED WHITE.
- ALL UNMARKED TOLERANCES: $\pm 0.20\text{mm}$
- LCD NO.: TBS-052

MULTI-INNO TECHNOLOGY CO.,LTD.

DRAWN BY:	TITLE: MI640480A-T	
CHECKED BY:	DWG NO: G-2	
APPROVED BY:	DWG NAME: TMC	SCALE: UNIT: mm
CONFIRMED BY:	SHEET NO: 1 OF 1	