





MODULE NO.: MI8048A-G

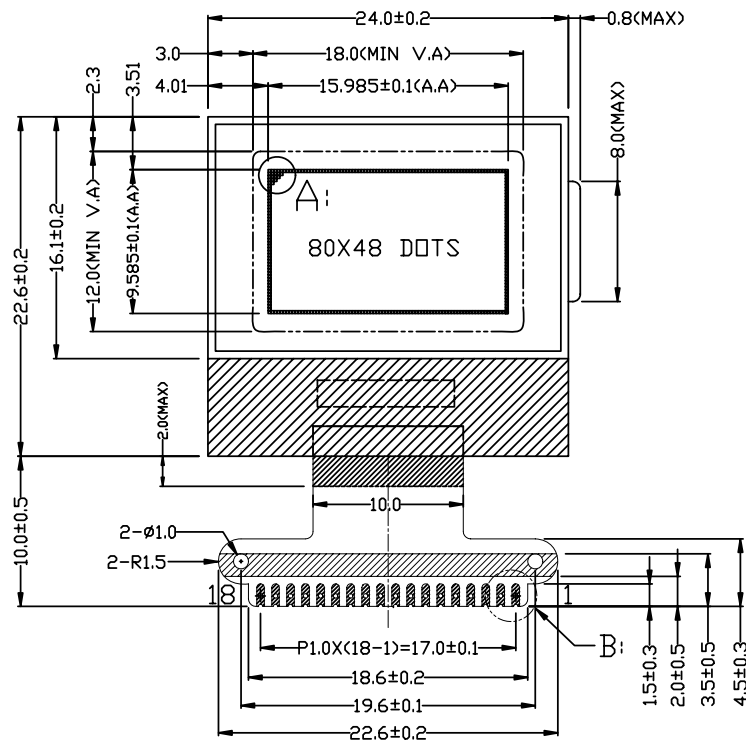


NOTES:


1. DISPLAY TYPE: FSTN
2. VIEWING DIRECTION: 6:00
3. POLARIZER MODE: TRANSFLECTIVE/POSITIVE
4. LOGIC VOLTAGE: 2.8V
5. LCD OPERATING VOLTAGE: 9.2V
6. DRIVE METHOD: 1/65 DUTY 1/9 BIAS
7. OPERATING TEMP.: -20°C+70°C
8. STORAGE TEMP.: -30°C+80°C
9. CONTROLLER: SSD1815BZ
10. WITHOUT BACKLIGHT
11. UNMARKED TOLERANCES: ±0.3mm

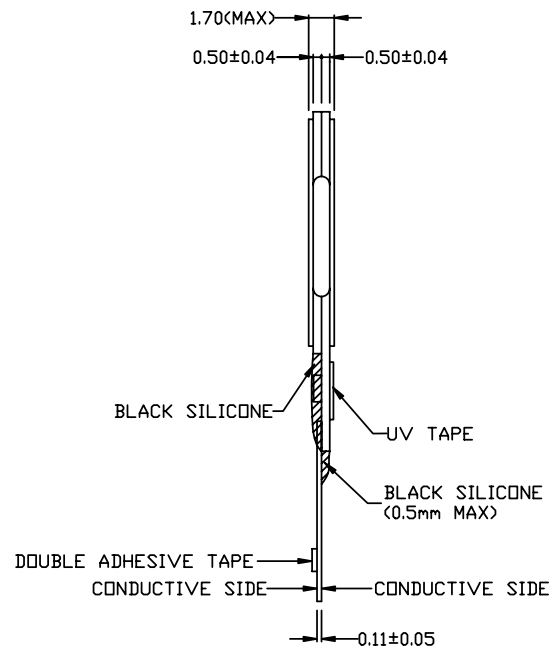

DETAIL A:



DETAIL B:



NO.	PIN
1	/CS1
2	/RES
3	D/C
4	SCK
5	SDA
6	VDD
7	VSS
8	VOUT
9	C3N
10	C1P
11	C1N
12	C2N
13	C2P
14	VL2
15	VL3
16	VL4
17	VL5
18	VL6

MULTI-INNO TECHNOLOGY CO.,LTD.

DRAWN BY:	TITLE: MI8048A-G	
CHECKED BY:	DWG NO: G-1	
APPROVED BY:	DWG NAME:	SCALE:
CONFIRMED BY:		UNIT: mm
		SHEET NO: 1 OF 1