

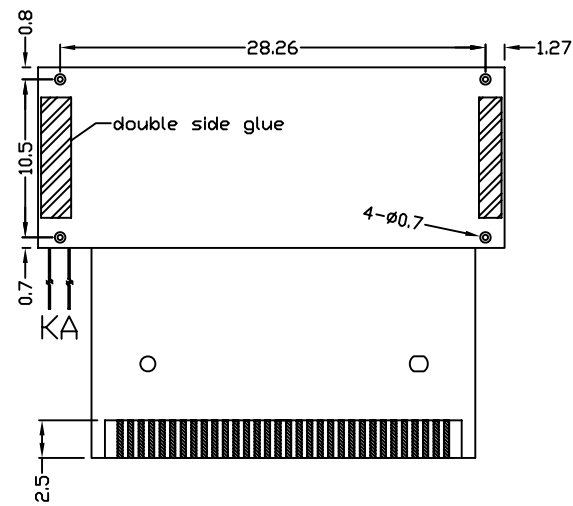
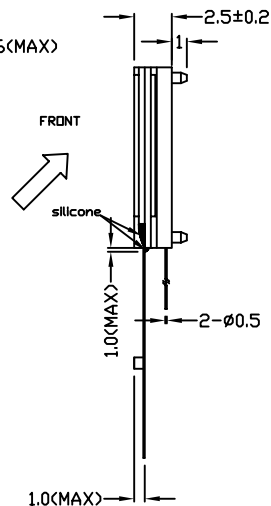


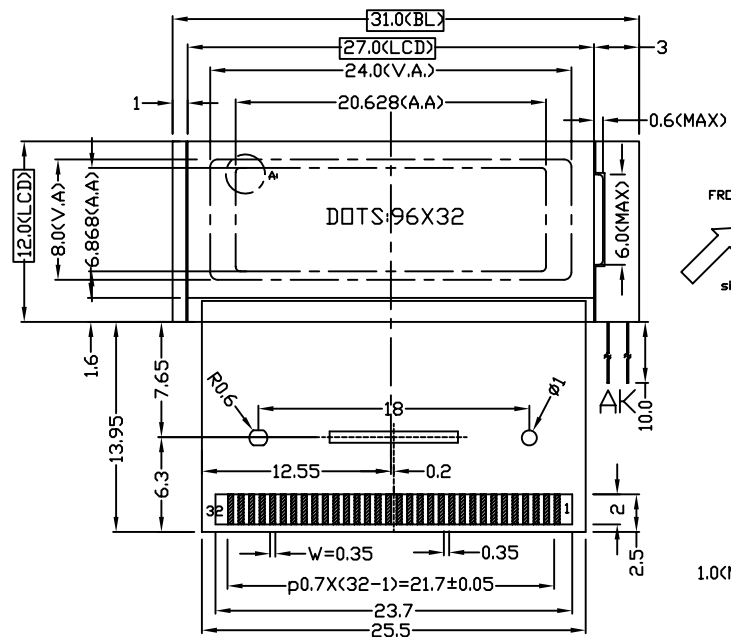

- NOTE:
1. DISPLAY TYPE: FSTN
 2. VIEWING DIRECTION: 6:00
 3. POLARIZER MODE: TRANSMISSIVE/NEGATIVE
 4. LCD CONTROLLER: ST7565P
 5. DRIVE METHOD: 1/65 DUTY
BIAS=1/9
 6. OPERATING VOLTAGE: $V_{op}=9.5\text{ V}$
 $V_{DD}=3.0\text{ V}$
 7. BACKLIGHT: 1-CHIP WHITE LED
 8. OPERATING TEMP: $-20^{\circ}\text{C}\sim 70^{\circ}\text{C}$
 9. STORAGE TEMP: $-30^{\circ}\text{C}\sim 80^{\circ}\text{C}$
 10. UNMARKED TOLERANCE: ± 0.2
 11. REQUIREMENTS ON ELEMENTAL PROTECTION: ROHS
 12. CONTROL SIZE:



DETAIL A:
SCALE:1:20

	PIN
1	DUMMY
2	CS1B
3	CS2
4	RESB
5	A0
6	WRB(R/W)
7	RDB(E)
8	D0
9	D1
10	D2
11	D3
12	D4
13	D5
14	D6
15	D7
16	VDD
17	VSS
18	VOUT
19	DUMMY
20	CAP3P
21	CAP1N
22	CAP1P
23	CAP2P
24	CAP2N
25	V4
26	V3
27	V2
28	V1
29	V0
30	VR
31	C86
32	DUMMY

MULTI-INNO TECHNOLOGY CO.,LTD

G-4	CHANGE LCD ASSEMBLY AND BL
G-3	CHANGE THE VOLTAGE
G-2	CHANGE BIAS AND DUTY
REV	DESCRIPTION

DRAWN BY:	TITLE: MI9632D-T	
CHECKED BY:	DWG NO: G-4	
APPROVED BY:	DWG NAME: MI9632D-T	SCALE: mm
CONFIRMED BY:	SHEET NO: 1 OF 1	