


Multilayer Ferrite Chip Beads




Chilisin offers a wide range of multi-layered ferrite chip beads with various sizes, frequency characteristics, and impedance values for EMI solutions. These ferrite formulas are used to compose seven types of EMI suppression chip beads: SB, GB, PB, UPB, NB, HF, and VPB series.

Product Identification

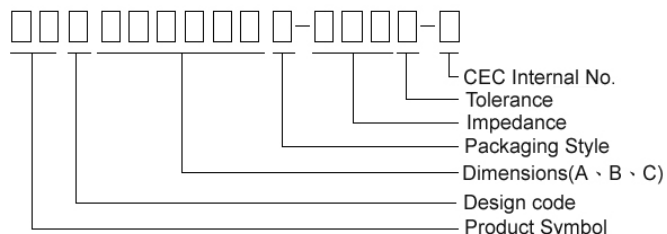

- Product symbol: SB, GB, PB, UPB, NB, HF, VPB
- Packaging: T : Tape and Reel ; B : Bulk
- Tolerance: Y = $\pm 25\%$; M = $\pm 20\%$; T: $\pm 30\%$
- Note: RoHS Compliant

Shape and Dimensions



Dimensions in mm


TYPE	A	B	C	D
①060303	0.6 $\pm$ 0.03	0.30 $\pm$ 0.03	0.3 $\pm$ 0.03	0.15 $\pm$ 0.05
②100505	1.0 $\pm$ 0.10	0.50 $\pm$ 0.10	0.5 $\pm$ 0.10	0.25 $\pm$ 0.10
③160808	1.6 $\pm$ 0.15	0.80 $\pm$ 0.15	0.8 $\pm$ 0.15	0.3 $\pm$ 0.2
④201209	2.0 $\pm$ 0.20	1.25 $\pm$ 0.20	0.9 $\pm$ 0.20	0.5 $\pm$ 0.3
⑤201212	2.0 $\pm$ 0.20	1.25 $\pm$ 0.20	1.25 $\pm$ 0.20	0.5 $\pm$ 0.3
④321611	3.2 $\pm$ 0.20	1.60 $\pm$ 0.20	1.1 $\pm$ 0.20	0.5 $\pm$ 0.3
⑥321616	3.2 $\pm$ 0.20	1.60 $\pm$ 0.20	1.6 $\pm$ 0.20	0.5 $\pm$ 0.3
⑦322513	3.2 $\pm$ 0.20	2.50 $\pm$ 0.20	1.3 $\pm$ 0.20	0.5 $\pm$ 0.3
⑧451616	4.5 $\pm$ 0.25	1.60 $\pm$ 0.20	1.6 $\pm$ 0.20	0.5 $\pm$ 0.3
⑧453215	4.5 $\pm$ 0.25	3.20 $\pm$ 0.20	1.5 $\pm$ 0.20	0.5 $\pm$ 0.3

- ① : SB / PB / NB ② : SB / PB / NB / HF ⑦ : SB / PB
 ③ : SB / PB / NB / GB / UPB / HF / VPB ⑤ : UPB ⑥ : SB
 ④ : SB / PB / NB / GB / UPB ⑧ : PB / UPB

Dimension Conversion

Code	Dimension in mm (AxBxC)	EIA
060303	0.6X0.3X0.3	0201
100505	1.0X0.5X0.5	0402
160808	1.6x0.8x0.8	0603
201209	2.0x1.2x0.9	0805
201212	2.0x1.2x1.25	0805
321611	3.2x1.6x1.1	1206
321616	3.2x1.6x1.6	1206
322513	3.2x2.5x1.3	1210
451616	4.5x1.6x1.6	1806
453215	4.5x3.2x1.5	1812

Recommended Pattern



Dimensions in mm

TYPE	A	B	C
①060303	0.2 ~ 0.3	0.75 ~ 1.05	0.3
②100505	0.4	1.2 ~ 1.4	0.5
③160808	0.7 ~ 0.8	1.8 ~ 2.0	0.6 ~ 0.8
④201209	1.0 ~ 1.2	2.6 ~ 4.0	1.0 ~ 1.2
⑤201212	1.0 ~ 1.2	2.6 ~ 4.0	1.0 ~ 1.2
④321611	2.0	4.2 ~ 5.2	1.2
⑥321616	2.0	4.2 ~ 5.2	1.2
⑦322513	2.0	5.5 ~ 6.5	1.8
⑧451616	3.0	5.5 ~ 6.5	1.2
⑧453215	3.0	5.5 ~ 6.5	2.4





- * Don't apply narrower pattern than listed above to PB and UPB. Narrow pattern might cause excessive heat or open circuit.

SMD Multilayer Ferrite Chip Beads – HFY Series

Electrical Characteristics

Part Number	Test Frequency (MHz)	Impedance ($\Omega \pm 25\%$)	Test Frequency (MHz)	Impedance ($\Omega \pm 40\%$)	DC Resistance (Ω) Max	Rated current (mA) Max
HFY100505T-221Y-N	100	220	1000	270	0.55	450
HFY100505T-301Y-N	100	300	1000	450	0.55	350
HFY100505T-471Y-N	100	470	1000	650	0.60	300
HFY100505T-601Y-N	100	600	1000	1000	0.7	300
HFY100505T-102Y-N	100	1000	1000	1400	1.1	250

Test Instruments : Agilent E4991A Impedance / Material Analyzer


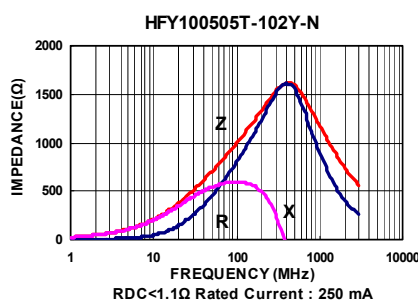
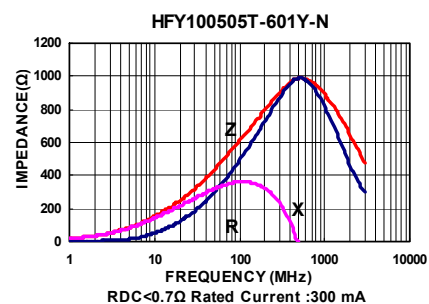
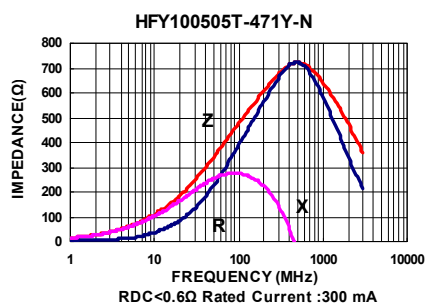
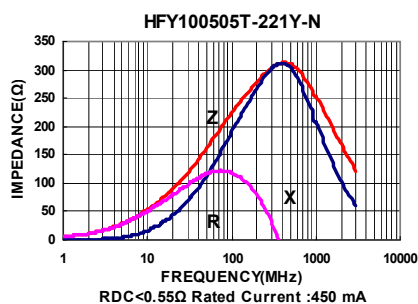


SMD Multilayer Ferrite Chip Beads – HFY Series

Electrical Characteristics

Part Number	Test Frequency (MHz)	Impedance ($\Omega \pm 25\%$)	Test Frequency (MHz)	Impedance ($\Omega \pm 40\%$)	DC Resistance (Ω) Max	Rated current (mA) Max
HFY160808T-301Y-N	100	300	1000	550	0.7	200
HFY160808T-471Y-N	100	470	1000	600	0.7	200
HFY160808T-601Y-N	100	600	1000	700	0.8	200
HFY160808T-102Y-N	100	1000	1000	1000	1.5	100
HFY160808T-152Y-N	100	1500	1000	1500	1.6	100


Test Instruments : Agilent E4991A Impedance / Material Analyzer

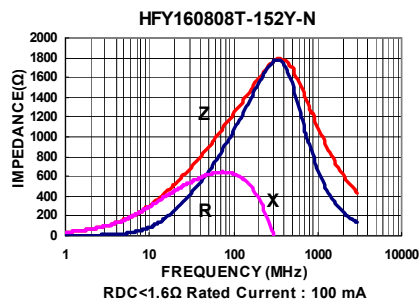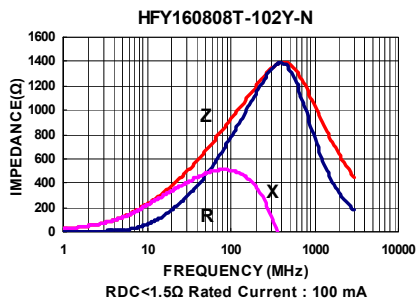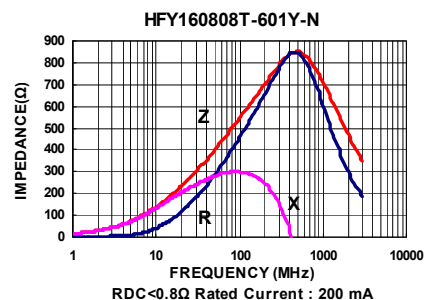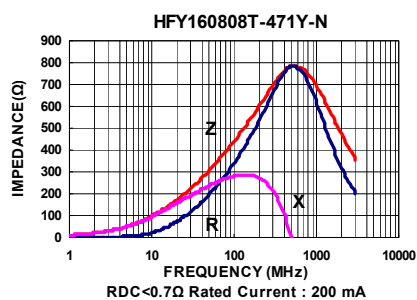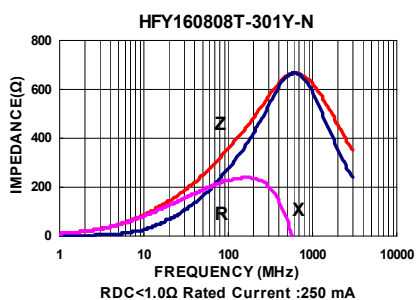

CHILISIN ELECTRONICS CORP.


Packaging Specifications

Tape Dimensions

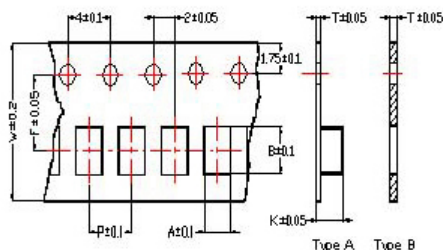


Tape Material

Carrier Tape: Polycarbonate (Tape A)
Carrier Tape: Paper (Tape B)
Cover Tape: Polystyrene

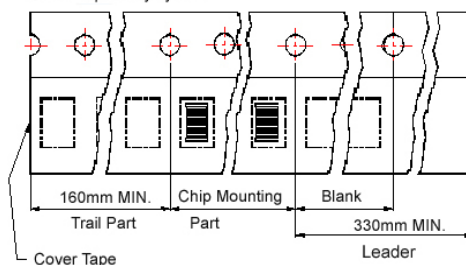

Reel Dimensions

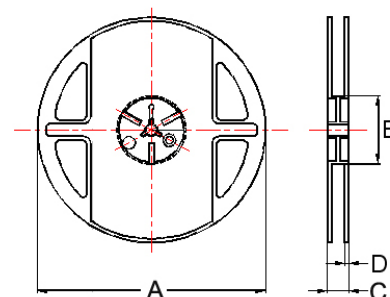

- ① : SB / PB / NB ② : SB / PB / NB / HF ③ : SB / PB
④ : SB / PB / NB / GB / UPB / HF / VPB ⑤ : UPB
⑥ : SB / PB / NB / GB / UPB ⑦ : SB ⑧ : PB / UPB

Dimensions in mm

TYPE	Tape Dimensions								Reel Dimensions				Quantity PCS / REEL
	A	B	T	W	P	F	K	Tape	A	B	C	D	
①060303	0.38	0.67	0.45	8.0	2.0	3.5	-	B	178	60	10	2	15000
②100505	0.65	1.15	0.60	8.0	2.0	3.5	-	B	178	60	12	2	10000
③160808	1.05	1.85	0.95	8.0	4.0	3.5	-	B	178	60	12	2	4000
④201209	1.50	2.30	0.97	8.0	4.0	3.5	-	B	178	60	12	2	4000
⑤201212	1.35	2.25	0.22	8.0	4.0	3.5	1.35	A	178	60	12	2	3000
④321611	1.88	3.50	0.22	8.0	4.0	3.5	1.27	A	178	60	12	2	3000
⑥321616	1.88	3.53	0.22	8.0	4.0	3.5	1.80	A	178	60	12	2	2000
⑦322513	2.77	3.42	0.22	8.0	4.0	3.5	1.55	A	178	60	12	2	2500
⑧451616	1.93	4.95	0.24	12	4.0	5.5	1.93	A	178	60	14	2	2000
⑧453215	3.66	4.95	0.24	12	8.0	5.5	1.85	A	178	60	14	2	1000